

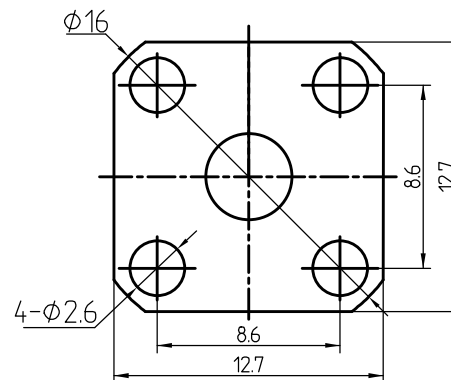


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	01/07/16	01/07/16

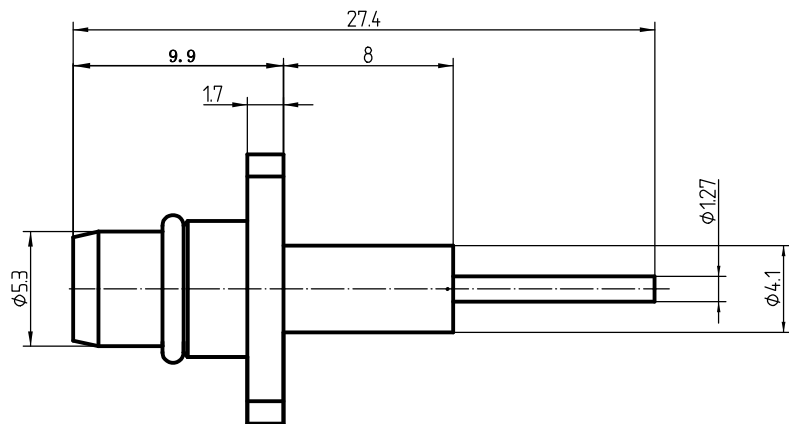

Mounting Hole



1 Electrical



- 1.1 Impedance 50Ω
- 1.2 Frequency DC~6GHz
- 1.3 Dielectric withstanding voltage 750V(rms)
- 1.4 Center contact resistance ≤3 MΩ
- 1.5 Outer contact resistance ≤2 MΩ
- 1.6 Insulation resistance: ≥5000 MΩ
- 1.7 VSWR ≤1.25:1

2 Material&Finish

- 2.1 Body: Stainless Steel, Passivated
- 2.2 Insulator: Teflon
- 2.3 Center Pin: Beryllium-copper, Gold Plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 01/07/16 ENGINEER: C. Tao 01/07/16 APPROVED: W. Qiang 01/07/16 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Coaxial Connector BMA Male Flange Conn. Terminal PART NO: BMA-JFD3AG	 www.teruilai.com  DIMENSION IN MILLIMETERS (mm)	
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A