

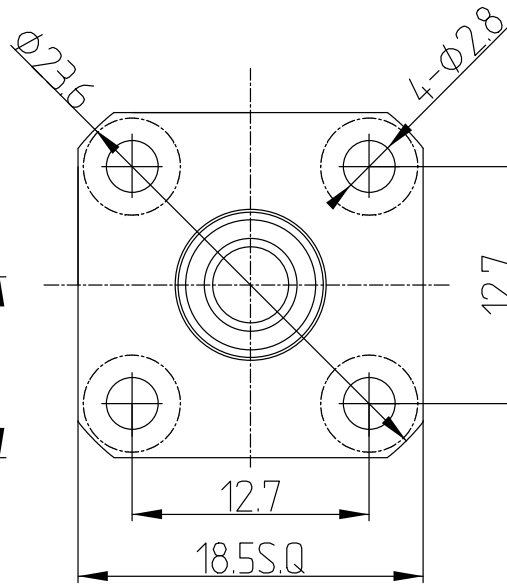


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	09/07/15	09/07/15

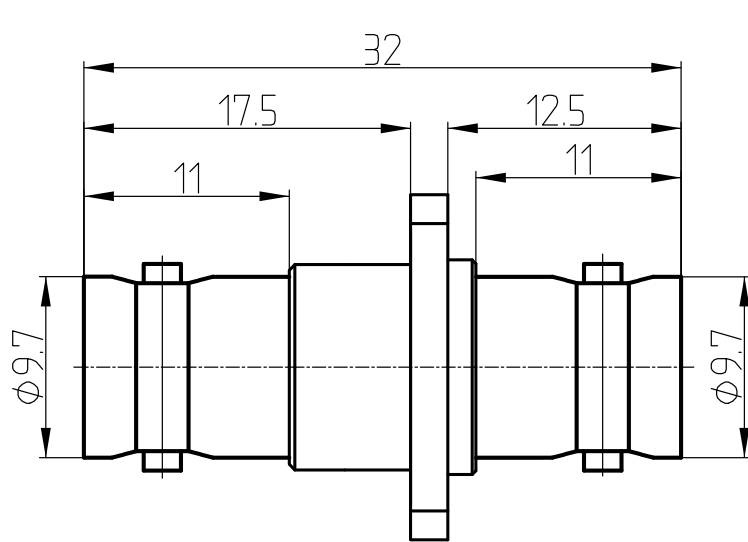

Mounting Hole

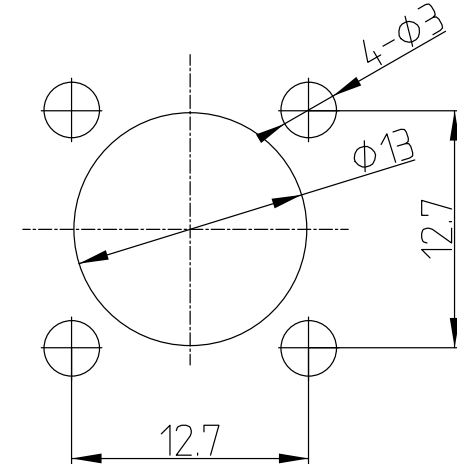

1 Electrical

- 1.1 Impedance 50 Ω
1.2 Frequency DC-4GHz
1.3 Dielectric withstanding voltage 1000V(volts RMS)
1.4 Center contact resistance $\leq 3M\Omega$
1.5 Outer contact resistance $\leq 2M\Omega$
1.6 Insulation resistance: $\geq 5000M\Omega$

2 Environmental&Mechanical



- 2.1 Temperature range -45 $^{\circ}$ C~85 $^{\circ}$ C
2.2 RoHS Compliant
2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, Nickel Plated
3.2 Insulator: Teflon
3.3 Contact Pin: Bronze, Gold plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 09/07/15		TITLE: RF Adaptor	 www.trf-rf.com			
ENGINEER: C. Tao 09/07/15						
APPROVED : W. Qiang 09/07/15			 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 X ±0.20 XX ±0.10 ANGLES ±1°						
PART NO: BNC-KFKA		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	