

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Haiyun	21/05/08	21/05/08

1 Electrical

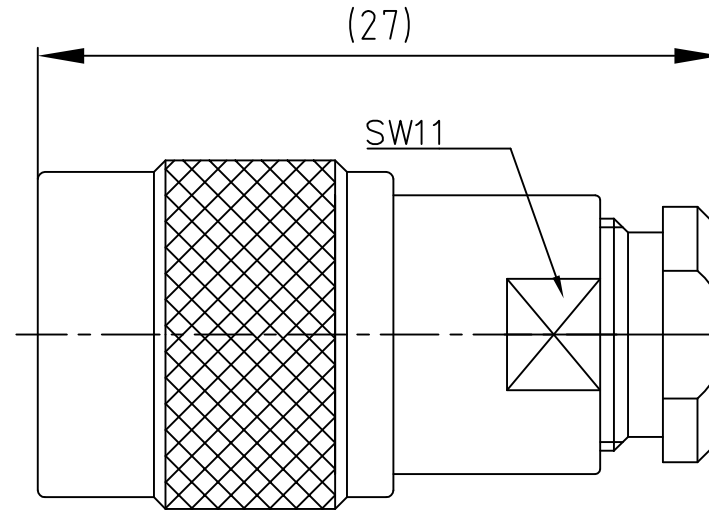
1.1 Impedence	50Ω
1.2 Frequency	DC~6GHz
1.3 Dielectric withstanding voltage	1500V(volts RMS)
1.4 Center contact resistance	≤ 1.5MΩ
1.5 Outer contact resistance	≤ 0.2MΩ
1.6 Insulation resistance:	≥5000MΩ

2 Environmental&Mechanical

2.1 Temperature range	-40℃~+70℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles



3 Materials&plating

3.1 Body:	Brass; Nickel plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass, Gold plated
3.4 Nut:	Brass, Nickel plated
3.5 Gasket:	Silicon Rubber (red color)
3.6 Washer	Brass, Nickel plated



Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Haiyun 21/05/08	TITLE:	 www.t-rely.com.cn
ENGINEER: C.Tao 21/05/08	TNC-J5A	
APPROVED: W.Qiang 21/05/08	TNC Male Conn. for RG58 Cable Clamp	 DIMENSION IN MILLIMETERS (mm)
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: TRL-TNCM-23650	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A