

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	W.Qiang	18/03/06	18/03/06
B	New Release	—	T.Haiyun	16/07/13	16/07/13

1 Electrical


- 1.1 Impedence 50Ω
- 1.2 Frequency 0~6GHz
- 1.2 Dielectric withstanding voltage 1500V(volts RMS)
- 1.3 Working Voltage: 1000V rms
- 1.5 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~85℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles

3 Materials&plating (Micro-inch)

- 3.1 Body: Brass, nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated
- 3.4 Housing: Brass, nickel plated
- 3.5 Coupling nut: Brass, nickel plated
- 3.6 Ferrule: copper, nickel plated

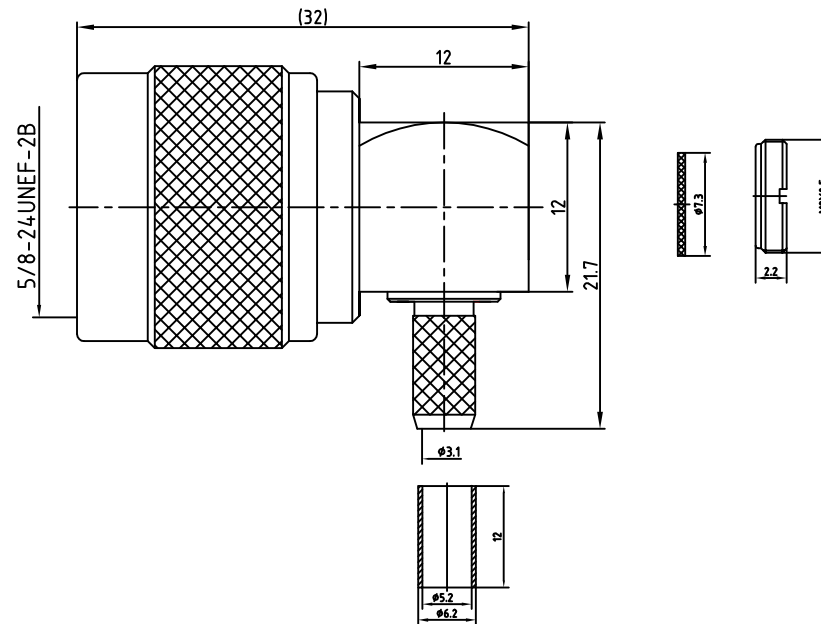

Notes:
 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Haiyun 16/07/13	TITLE: N-JW5Y N male R/A Conn. For RG58 cable	 www.t-relytech.com				
ENGINEER: C.Tao 16/07/13						
APPROVED: W.Qiang 16/07/13		DIMENSION IN MILLIMETERS (mm)				
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		PART NO: TRL-NWM-9348	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: B