

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Shihua	02/09/16	02/09/16

1 Electrical

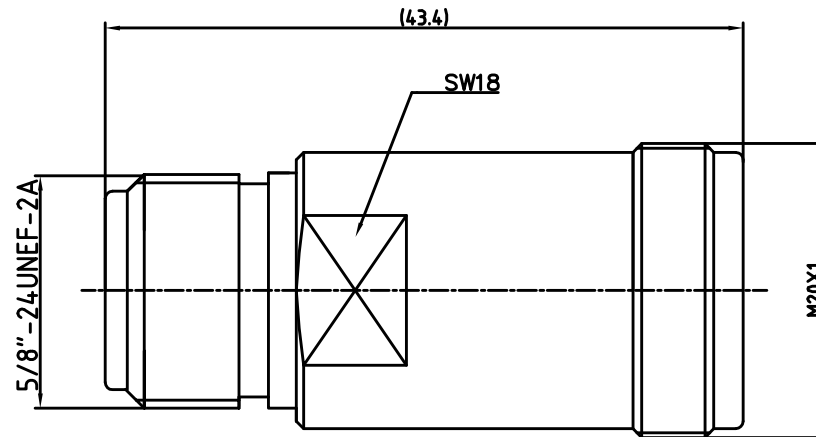
- 1.1 Impedence 50Ω
- 1.2 Frequency DC-11GHz
- 1.3 Dielectric withstanding voltage 2000V(volts RMS)
- 1.4 Insulation resistance: ≥5000MΩ
- 1.5 VSWR ≤1.2

2 Environmental&Mechanical

- 2.1 Temperature range -55℃~155℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles



3 Materials&plating

- 3.1 Body: Brass, Sucoplated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Phosphor Bronze, Silver plated



Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 02/09/16	TITLE:	 www.terulla.com
ENGINEER: C.Tao 02/09/16	Minidin/N-KK	
APPROVED: W.Qiang 02/09/16	MiniDin(4.1/9.5) Female to N Female Adapter	 DIMENSION IN MILLIMETERS (mm)
TOLERANCES UNLESS OTHERWISE SPECIFIED .X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: TRL-MINIDIN262340	