

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

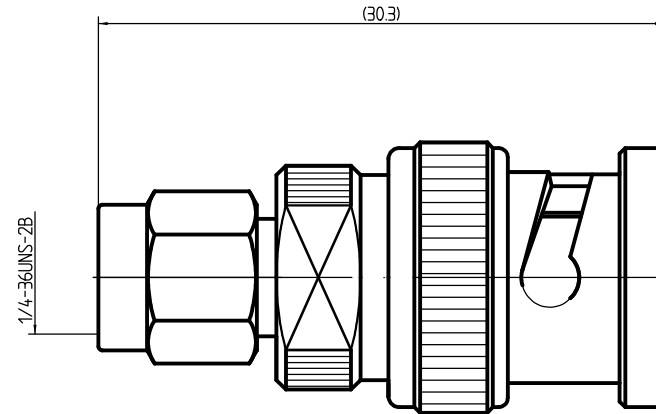
REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	09/07/15	09/07/15

1 Electrical Data:

- 1. Impedance: 50 Ω
- 2. Working voltage: ≤500V
- 3. Insulation resistance: ≥5000M Ω
- 4. Dielectric withstanding voltage: 1500V
- 5. Center Contact resistance ≤ 1.5M Ω
- 6. Outer Contact resistance ≤ 1.0M Ω



2 Material & Finish

Inner Contact: gold plated over Phosphor bronze
 Outer Contact: nickel plated over brass.
 Insulators: Teflon



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 09/07/15 ENGINEER: C. Tao 09/07/15 APPROVED: W. Qiang 09/07/15 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Adaptor BNC Male to SMA Male Adaptor PART NO: BNC/SMA-JJ	 www.tri-rf.com  DIMENSION IN MILLIMETERS (mm) SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A
--	--	---