

1


2

3

4

A

A

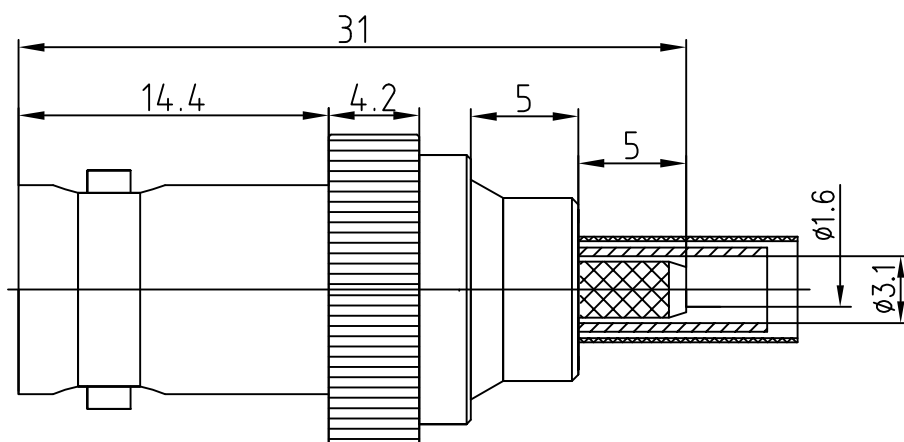

B

B

1 Electrical Data:

1.Impedance: 50Ω

2.Working voltage: $\leq 500V$

3.Insulation resistance: $\geq 5000M\Omega$

4.Dielectric withstanding voltage: $1500V$

5. Center Contact resistance $\leq 1.5M\Omega$

6 Outer Contact resistance $\leq 1.0M\Omega$

C

C

2 Material&Finish


Inner Contact: gold plated over Phosphor bronze

Outer Contact: nickel plated over brass.

Insulators: Teflon

D

D



Scale

N/A

BNC-K3Y

BNC Female Conn. for RG316 cable

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES

.X± .15 ±1°

.XX± .05

.XXX±

Designed

Tomson

24-Oct-10

Checked

Jason

24-Oct-10

Approved

Teresa

24-Oct-10

Danyang Teruilai Electronics Co.,Ltd