

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV		DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release			T.Holyn	28/8/13	28/8/13

1 Electrical

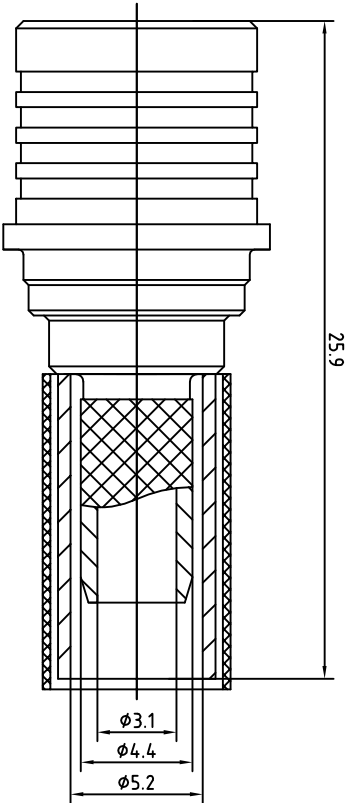
- 1.1 Impedence 50 Ω
- 1.2 Frequency 0~18GHz
- 1.2 Dielectric withstanding voltage 1000V(volts RMS)
- 1.3 Working Voltage: 335V rms
- 1.5 Insulation resistance: $\geq 5000M\Omega$

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~85℃
- 2.2 RoHS Compliant
- 2.3 Durability >500 cycles



3 Materials&plating

- 3.1 Body: Brass, SUCO plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated
- 3.4 Housing: Brass, SUCO plated



Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Holyn 28/08/13	TITLE: QMA-J5V			 www.t-rel-ytech.com
ENGINEER: C.Too 28/08/13	QMA male Str. Conn. For			
APPROVED: W.Qiang 28/08/13	RG58 cable			
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X ±0.50				
XX ±0.20				
ANGLES ±1°				
PART NO: TRL-QMAM-5139	SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
 DIMENSION IN MILLIMETERS (mm)				