


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 Dielectric withstanding voltage 1500V(volts RMS)
 - 1.4 Center contact resistance ≤ 15MΩ
 - 1.5 Outer contact resistance ≤ 0.2MΩ
 - 1.6 Insulation resistance: ≥ 5000MΩ

- 2 Environmental & Mechanical
 - 2.1 Temperature range -40℃ ~ +125℃
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials & plating
 - 3.1 Body: Brass; Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated

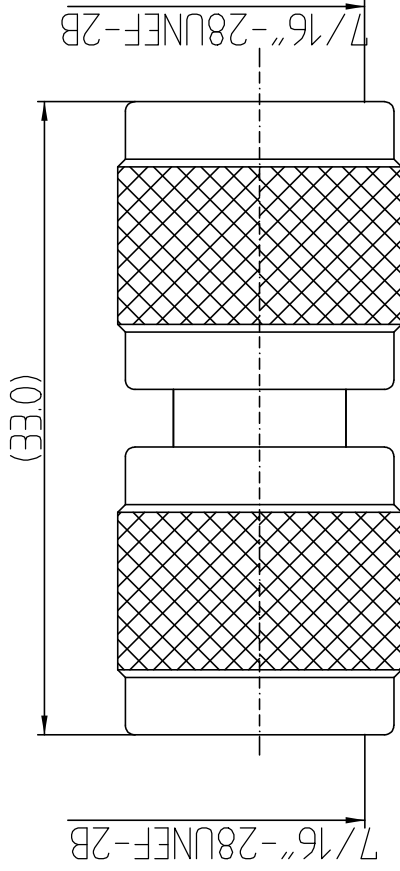

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	16/06/16	16/06/16

DRAWN: T. Haiyun 16/06/16		TITLE: RF Adaptor	
ENGINEER: C. Tao 16/06/16		www.rf-connector-china.com	
APPROVED: W. Qiang 16/06/16		TNC Male to Male Adaptor	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X	+0.50	SCALE: N/A	SHEET: 1/1
X	+0.20	SIZE: A4	REV: A
XX	+0.10		
	ANGLES *°		