




This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
  - 1.1 Impedence 50 Ω
  - 1.2 Frequency 0~6GHz
  - 1.2 VSWR 1:30:1
- 2 Environmental&Mechanical
  - 2.1 Temperature range -40 °c ~85 °c
  - 2.2 RoHs Compliant
  - 2.3 Durability >500 cycles
- 3 Materials&plating
  - 3.1 Body: Brass, SUCO plated
  - 3.2 Insulator: Teflon
  - 3.3 Contact Pin: Brass, Gold plated
  - 3.4 Housing: Brass, SUCO plated
  - 3.5 Spring Contact: Bronze, Suco-plated

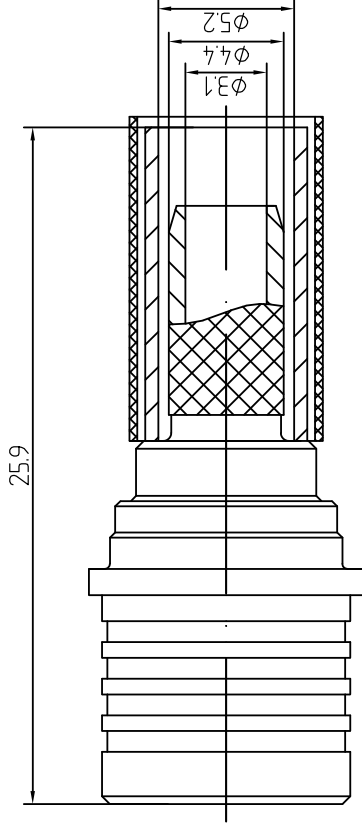

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyuu	28/8/13	28/8/13

- Notes:
- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
  - 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Haiyuu 28/08/13	TITLE: RP Coaxial Connector	 www.tenulial.com
ENGINEER: C. Tao 28/08/13	QMA male Str. Conn. For LMR200 cable	
APPROVED : W. Qiang 28/08/13		 DIMENSION IN MILLIMETERS (mm)
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±°		
PART NO: QMA-1200Y	SCALE: 1:1	REV: A
	SIZE: A4	SHEET: 1/1