



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	16/6/15	16/6/15

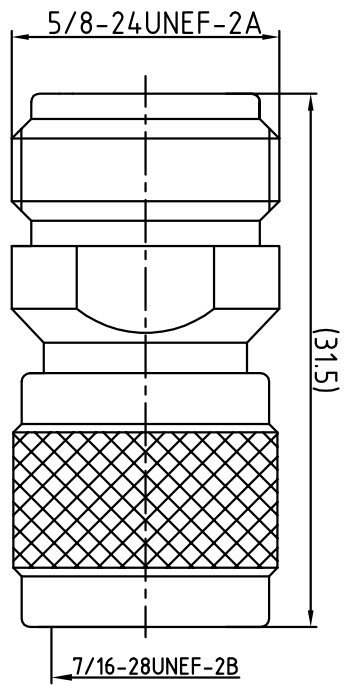


- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency 0~11GHz
 - 1.3 Dielectric withstanding voltage 1500V(volts RMS)
 - 1.4 Center contact resistance $\leq 1.5M\Omega$
 - 1.5 Outer contact resistance $\leq 0.2M\Omega$
 - 1.6 Insulation resistance: $\geq 5000M\Omega$

- 2 Environmental&Mechanical
 - 2.1 Temperature range -55 $^{\circ}$ C~155 $^{\circ}$ C
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials&plating
 - 3.1 Body: Brass, nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, Gold plated

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 16/6/15	TITLE: N/TNC-KJ	 www.terlial.com
ENGINEER: C.Too 16/6/15	N Female to TNC Male adaptor	
APPROVED: W.Qiang 16/6/15	PART NO: TRL-ZLQ-328910	SIZE: A4
TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: N/A
X 0.10		SHEET: 1/1
.XX 0.20		REV: A
ANGLES 3 $^{\circ}$		