


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1. Electrical
  - 1.1 Impedance: 50ohm
  - 1.2 Frequency: DC-6GHz
  - 1.3. Insulation resistance:  $\geq 5000M\Omega$
  - 1.4 Dielectric withstanding voltage: 500V (rms)
  - 1.5 VSWR: 1.20:1
- 2 Material&Finish
  - 2.1 Inner Contact: Brass, gold plated
  - 2.2 Outer Contact: Bronze, gold plated
  - 2.3 Insulators: PTFE

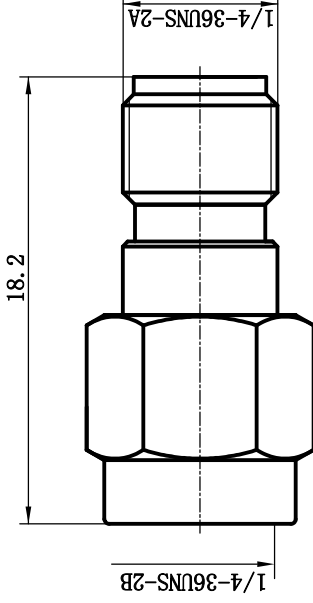

**Notes:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	01/09/15	01/09/15

DRAWN: T. Shihua 01/09/15		TITLE: RF Adaptor	
ENGINEER: C. Tao 01/09/15		SMA Male to Female Adaptor	
APPROVED: W. Qiang 01/09/15		www.teruilai.com	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X	$\pm 0.50$		
.X	$\pm 0.20$		
.XX	$\pm 0.10$		
ANGLES $\pm 1^\circ$		SIZE: A4	SCALE: N/A
PART NO: SMA-JKB		SHEET: 1/1	REV: A