


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission



- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.2 VSWR 1.30:1
- 2 Environmental&Mechanical
 - 2.1 Temperature range -40 °c ~125 °c
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&plating
 - 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Coupling nut: Brass, Nickel plated

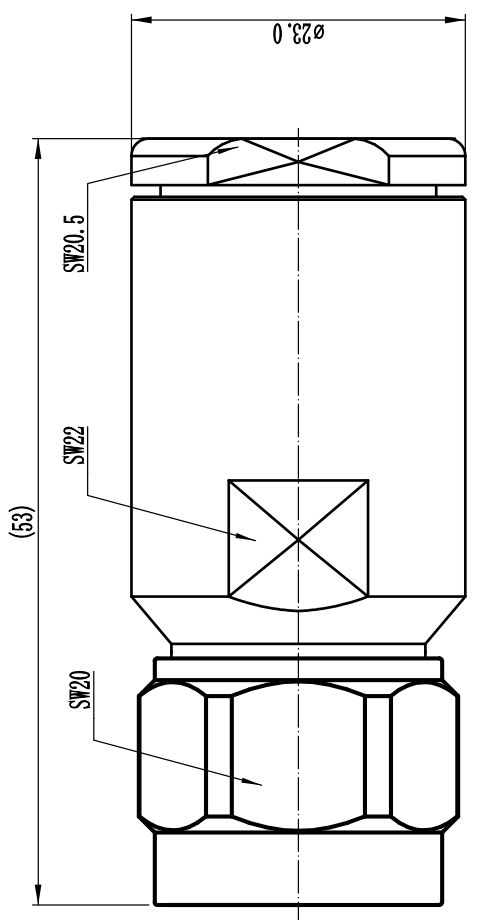

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	13/06/15	13/06/15

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 13/06/15		TITLE:	
DESIGNED : C. Tao 13/06/15		RF Connector	Connector
APPROVED : W. Qiang 13/06/15		N male Conn.	For JLR500 cable
TOLERANCES UNLESS OTHERWISE SPECIFIED		Part No:	NJ000A
X	±0.50	Scale:	A4
.X	±0.20	Sheet:	1/1
.XX	±0.10	Dim:	A
ANGLES	±°	DIMENSION IN MILLIMETERS (mm)	
			
www.tenbai.com			