


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC~6GHz
 - 1.2 Dielectric withstanding voltage 1500V (volts RMS)
 - 1.3 Working Voltage: 1000V rms
 - 1.5 Insulation resistance: ≥5000MΩ
 - 1.6 VSWR 1.30:1

- 2 Environmental&Mechanical
 - 2.1 Temperature range -40°C~125°C
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials&plating
 - 3.1 Body: Brass, Suco-plated
 - 3.2 Insulator: Teflon
 - 3,3 Contact Pin: Brass, Gold plated
 - 3.4 Ferrule: Copper, Nickel plated
 - 3.5 Coupling nut: Brass, Suco-plated

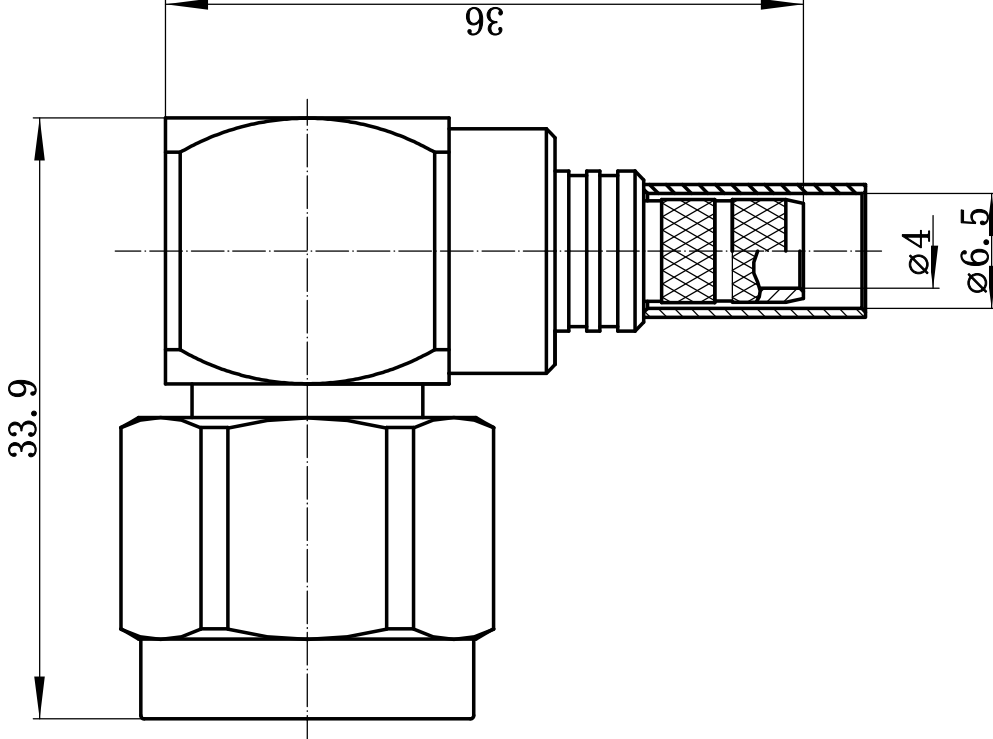

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	21/04/2021	21/04/2021

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 21/04/2021

ENGINEER: C. Tao 21/04/2021

APPROVED: W. Qiang 21/04/2021

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ±0.50

.X ±0.20

.XX ±0.10

ANGLES ±1°

TITLE:

RF Coaxial Connector

N male R/A Conn. For LMR240 cable

PART NO: N-JW240Y-T



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)

SCALE: N/A

SHEET: 1/1

REV: A