


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	17/06/21	17/06/21

400±4

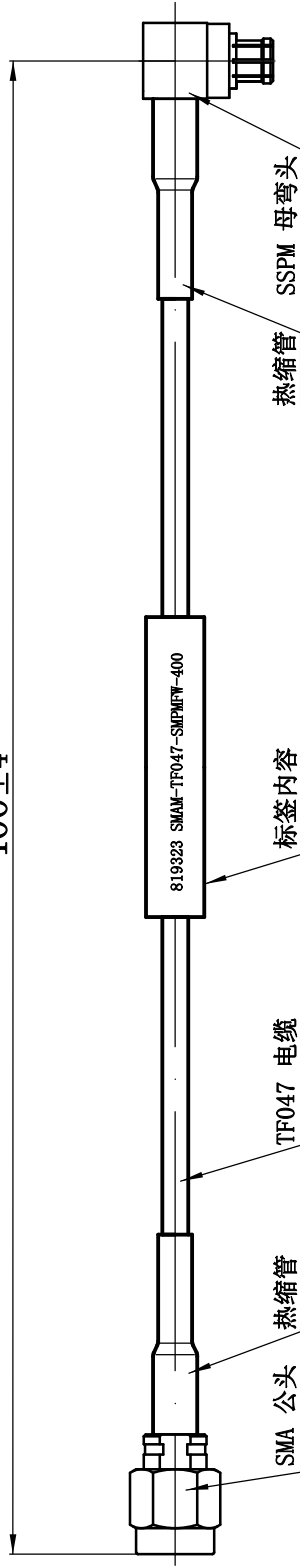

- 1 电气性能
 - 1.1 特性阻抗: 50 Ω
 - 1.2 使用频率: DC-4.5GHz
 - 1.3 驻波比: 1.15:1
 - 1.4 插损: ≤1.6dB
 - 1.5 绝缘电阻: ≥5000MΩ
 - 1.6 介质耐压: 750V (AC)
- 2 机械性能
 - 2.1 电缆弯曲半径: 10mm (单次), 20mm (多次)
 - 2.2 寿命: 大于100次
- 3 连接器 SMA-JBIAG
 - 3.1 内导体: 黄铜、镀金
 - 3.2 外导体: 黄铜、镀三元
 - 3.3 绝缘体: PTFE
 - 3.4 护套: 不锈钢, 钝化
- 4 连接器 SMPM-KWBL.37-3
 - 4.1 内导体: 铜青铜、镀金
 - 4.2 外导体: 铜青铜、镀金
 - 4.3 绝缘体: PTFE
- 5 使用环境
 - 5.1 工作温度 -40° C to 105° C

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 17/06/21	TITLE: Cable Assembly	深圳市天深达科技有限公司
ENGINEER: C. Tao 17/06/21	SMA Male to SMPM Female R/A for TF047 Cable Length 400mm	
APPROVED: W. Qiang 17/06/21		
TOLERANCES UNLESS OTHERWISE SPECIFIED		
X ±0.50		
.X ±0.20		
.XX ±0.10		
ANGLES ±1°		
PART NO: TRL-SMAM-TF047-SMPMFW-400	SCALE: N/A	SHEET: 1/1
	SIZE: A4	REV: A



DIMENSION IN MILLIMETERS (mm)