


This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

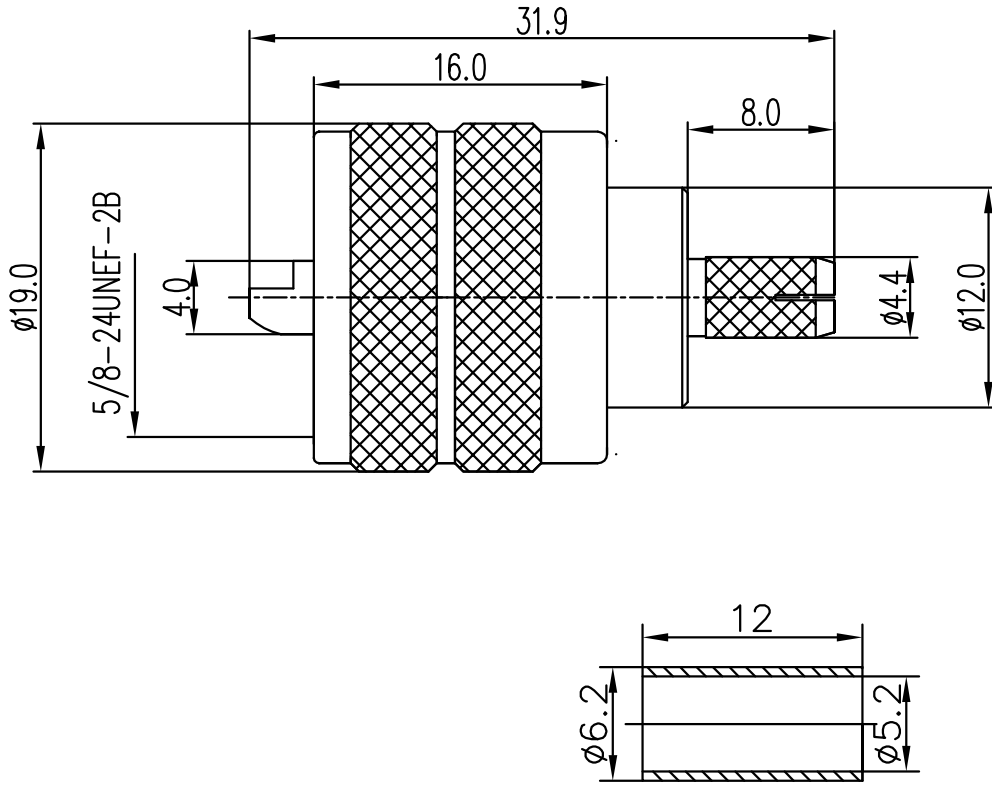

1. 电气性能

1. 频率: DC~300MHz
2. 中心导体接触电阻: 1.0 M $\Omega$  max
3. 外导体接触电阻: 0.2 M $\Omega$  max
4. 介质耐压: 1500V
5. 绝缘电阻: 5000M $\Omega$  min

2. 材料&涂覆

1. 中心导体: 黄铜镀银 (1-3 $\mu$ m)
2. 外壳: 黄铜镀镍 3 $\mu$ m
3. 绝缘材料: PTFE
3. 电缆代号: RG58/U
4. 包装: 一只一包

FIRST ANGLE PROJECTION		SCALE
THIRD ANGLE PROJECTION		N/A
	NAME	DATE
DRAWN	Tomson Tang	23-Feb-16
CHECKED	Mike Wang	23-Feb-16
APPROVED	Teresa Ma	23-Feb-16

UHF-J5BY  
RF Coaxial Connector

UNITS  
mm  
REV  
V1.0

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE mm, TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
.X $\pm$  .20 $\pm$  1'  
.XX $\pm$  .10  
.XXX $\pm$

丹阳特瑞莱电子有限公司