


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1000

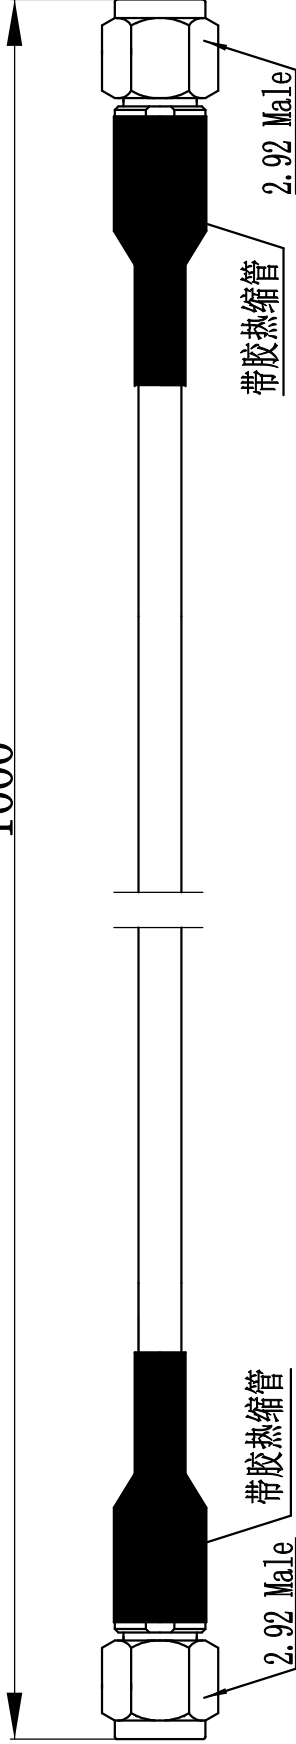

- 1 Electrical
 1.1 Impedence 50 Ω
 1.2 frequency DC-40GHz
 1.3 VSWR 1.25 : 1 max
 1.4 Insertion Loss 3.0dB max

3 Cable Type: Gore 3507 Cable

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	18/7/16	18/7/16

DRAWN: T. Shihua 18/7/16		TITLE: Cable assembly		www.tenulab.com	
ENGINEER: C. Tao 18/7/16		2.92 male straight to 2.92 male straight For Gore CXN3507 Cable length 1000mm		DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. Qiang 18/7/16		TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: N/A	
X +0.50		X +0.20		SHEET: 1/1	
XX +0.10		ANGLES ±°		REV: A	
PART NO: TEL-2.92M-3507-2.92M-1000		SIZE: A4		4	