


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

- 1.1 Impedence 50 Ω
- 1.2 Frequency DC ~50GHz
- 1.3 VSWR 1:15:1

2 Materials & plating

- 2.1 Body: Stainless Steel; Passivated
- 2.2 Insulator: Pei
- 2.3 Contact Pin: Beryllium-copper, gold plated
- 2.4 Nut: Stainless Steel; Passivated

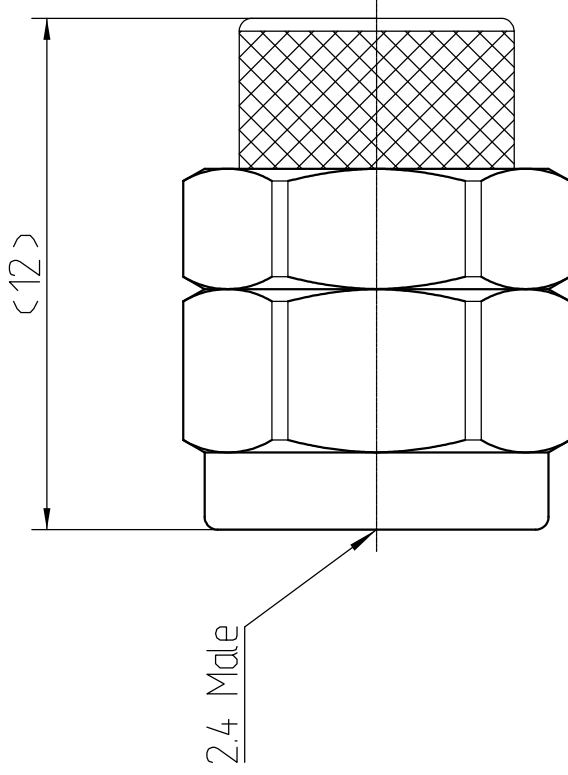

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	18/03/17	18/03/17

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 18/03/17

ENGINEER: C. Tao 18/03/17

APPROVED: W. Qiang 18/03/17

TOLERANCES UNLESS OTHERWISE SPECIFIED

X +0.50

.X +0.20

.XX +0.10

ANGLES *°

TITLE:
RF TERMINATION

2.4mm Male Conn. Termination

PART NO: 2.4-50JR



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)

SIZE: A4

SCALE: N/A

SHEET: 1/1

REV: A