


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	07/12/19	07/12/19



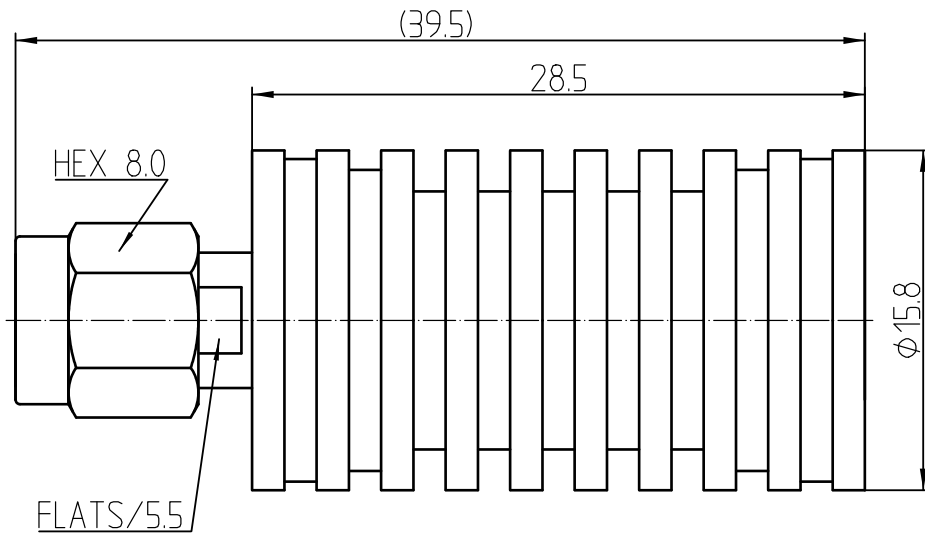

1 Electrical  
 1.1 Impedance 50  $\Omega$   
 1.2 Frequency DC~6GHz  
 1.3 VSWR 1.20:1  
 1.4 Power 10 Watts

2 Materials&plating  
 2.1 Body: Stainless Steel Passivated  
 2.2 Insulator: Teflon  
 2.3 Contact Pin: Bronze, gold plated  
 2.4 Coupling Nut: Stainless Steel Passivated  
 2.5 Outer Contact: Aluminium Oxidation Black

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Haiyun 07/12/19 ENGINEER: C. Tao 07/12/19 APPROVED : W. Qiang 07/12/19 TOLERANCES UNLESS OTHERWISE SPECIFIED X $\pm 0.50$ .X $\pm 0.20$ .XX $\pm 0.10$ ANGLES $\pm 1^\circ$	TITLE: RF TERMINATION SMA Male Conn. Termination 10Watts PART NO: SMA-50JR-10W	 <a href="http://www.trl-rf.com">www.trl-rf.com</a>  DIMENSION IN MILLIMETERS (mm)	
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A