


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission



REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	17/06/21	17/06/21

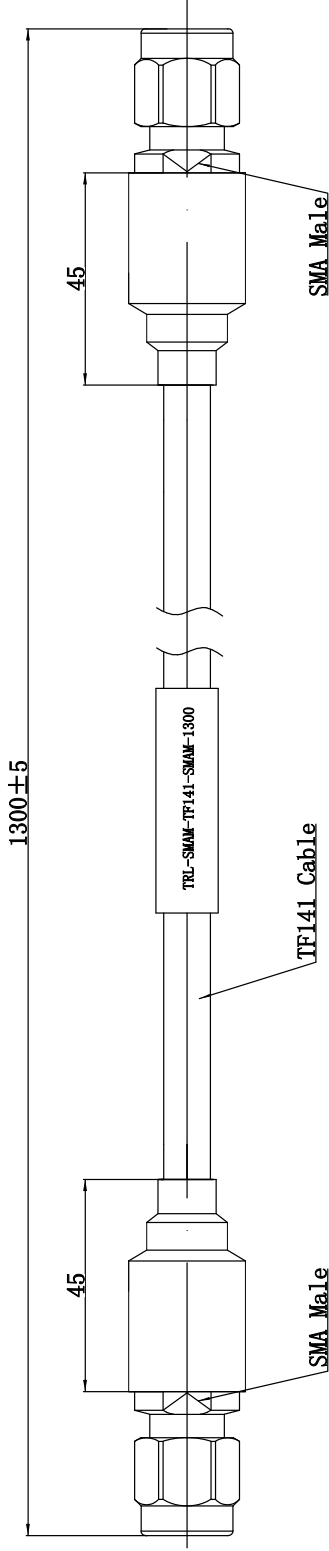

- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-18GHz
 - 1.3 VSWR: 1.15:1 (DC-6GHz) ; 1.30:1 (6-18GHz)
 - 1.4 Insertion Loss: ≤1.35dB (DC-6GHz) ; ≤2.6dB (6-18GHz)
- 2 Material&Finish
 - 2.1 Pin contact: Brass, gold plated
 - 2.2 Body: Brass Tri-Metal Plated
 - 2.3 Insulators: Teflon
 - 2.4 Coupling Nut: Stainless Steel, Passivated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 17/06/21	TITLE: Cable Assembly	 www.tendbai.com
ENGINEER: C. Tao 17/06/21	SMA Male to SMA Male for TF141 Cable Length 1300mm	
APPROVED : W. Qiang 17/06/21	 DIMENSION IN MILLIMETERS (mm)	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		
PART NO: TRL-SWAM-TF141-SWAM-1300		