


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1. Electrical
  - 1.1 Impedance: 50ohm
  - 1.2 Frequency: DC-6GHz
  - 1.3. Insulation resistance:  $\geq 5000M\Omega$
  - 1.4 Dielectric withstanding voltage: 500V (rms)
  - 1.5 VSWR: 1.20:1

- 2 Material&Finish
  - 2.1 Inner Contact: Brass, gold plated
  - 2.2 Outer Contact: brass, gold plated
  - 2.3 Insulators: PTFE



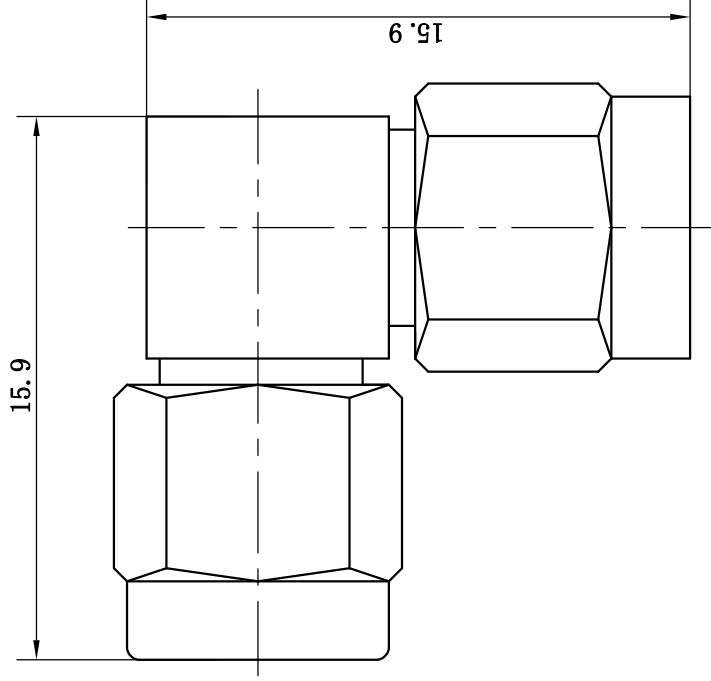

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 01/09/15
ENGINEER: C. Tao 01/09/15
APPROVED: W. Qiang 01/09/15
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:	
RF Adaptor	
SMA Male to Male Right Angle Adaptor	
PART NO:	SMA-JWJ

		<a href="http://www.teruilai.com">www.teruilai.com</a>	
		DIMENSION IN MILLIMETERS (mm)	
SIZE:	A4	SCALE:	N/A
SHEET:	1/1	REV:	A

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	01/09/15	01/09/15

3

4

2

1

3

4

2

1