



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	07/09/13	07/09/13

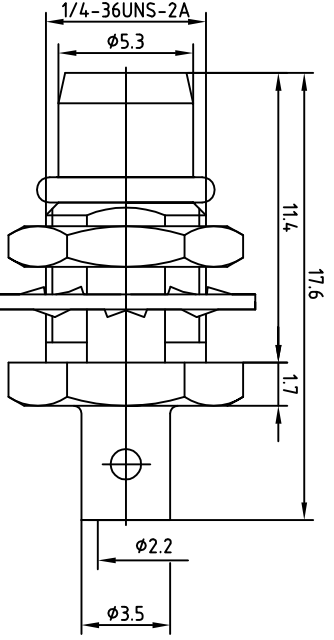

Mounting Hole



- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency range: DC-18GHz
 - 1.3 Working voltage: $\leq 250V$
 - 1.4 Dielectric withstanding voltage: 750V(volts RMS)
 - 1.5 Insulation resistance: $\geq 5000M\Omega$
 - 1.6 Center contact resistance: $\leq 3M\Omega$
 - 1.7 Outer contact resistance: $\leq 2M\Omega$

- 2 Environmental&Mechanical
 - 2.1 Temperature range: $-40^{\circ}C \sim 85^{\circ}C$
 - 2.2 RoHs Compliant
 - 2.3 Durability: 500 mating cycles

- 3 Materials&Finish
 - 3.1 Body: Brass, gold plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Hex nut: Brass, gold plated
 - 3.5 Gasket: Silicon Rubber
 - 3.6 Washer: Phosphor bronze, gold plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 07/09/13	TITLE: BMA-JYB2	<p>Aviv Interconnection Ltd.</p>
ENGINEER: C.Too 07/09/13	BMA male B/H Conn. For RG402 cable	
APPROVED: W.Qiang 07/09/13	PART NO: TRL-BMAW-1813	SIZE: A4
TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: 1:1
X 0.20		SHEET: 1/1
XX 0.10		REV: A
ANGLES 3°		

1 2 3 4