

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

3		4			
REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	——	T.Shihua	16/6/15	16/6/15

1 Electrical

- 1.1 Impedance

50 Ω
- 1.2 Frequency

0~11GHz
- 1.3 Dielectric withstanding voltage

1500V(volts RMS)
- 1.4 Center contact resistance

$\leq 1.5M\Omega$
- 1.5 Outer contact resistance

$\leq 0.2M\Omega$
- 1.6 Insulation resistance:

$\geq 5000M\Omega$

2 Environmental&Mechanical

- 2.1 Temperature range

-55℃~155℃
- 2.2 RoHS Compliant
- 2.3 Durability

>500 cycles

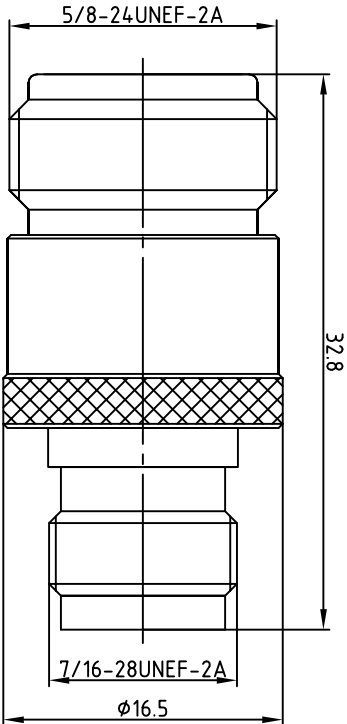
3 Materials&plating

- 3.1 Body:

Brass, nickel plated
- 3.2 Insulator:



Teflon
- 3.3 Contact Pin:

Bronze, Gold plated



Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 16/6/15		TITLE:	
ENGINEER: C.Too 16/6/15		N/TNC-KK	
APPROVED: W.Qiang 16/6/15		N Female to TNC female adaptor	
TOLERANCES UNLESS OTHERWISE SPECIFIED			
X ±0.50			
.X ±0.20			
.XX ±0.10			
ANGLES ±1°			
PART NO: TNL-ZJQ-328909			
SIZE: A4		SCALE: N/A	
SHEET: 1/1		REV: A	
			
		DIMENSION IN MILLIMETERS (mm)	

