


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

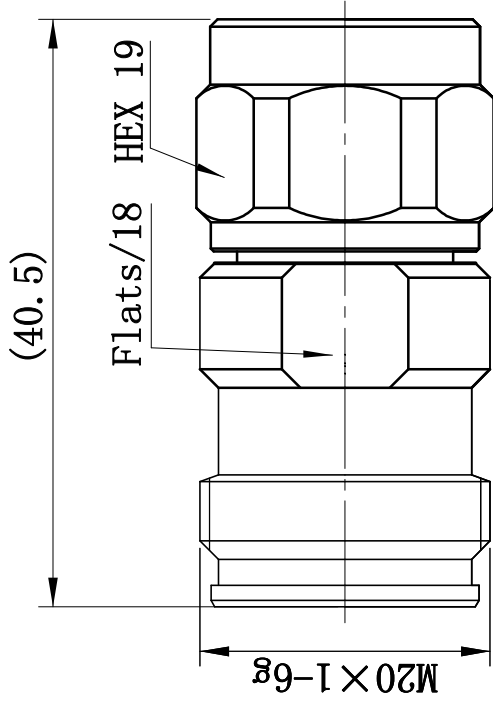

- 1 Electrical**
 11 Impedence 50 Ω
 12 Frequency DC-6GHz
 13 Dielectric withstanding voltage 2500V(volts RMS)
 14 Insulation resistance: ≥10000MΩ
 15 VSWR ≤1:15 @3GHz
 16 PIM ≤-160dBc(2x20w)
- 2 Environmental&Mechanical**
 2.1 Temperature range -45℃~125℃
 2.2 RoHS Compliant
 2.3 Durability >500 cycles
- 3 Materials&plating**
 3.1 Body: Brass, Suco-plated
 3.2 Insulator: Teflon
 3.3 Contact Pin: Phosphor Bronze, Silver plated
 3.4 Coupling Nut: Brass, sulpated
 3.5 Gasket: Silicon rubber (red color)

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	31/10/17	31/10/17

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 31/10/17
ENGINEER: C. Tao 31/10/17
APPROVED: W. Qiang 31/10/17
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 XX ±0.20 XXX ±0.10 ANGLES °R

TITLE:	
RF Coaxial Connector	
4. 3-10 (miniDin) Female to N Male Adaptor	
PART NO: 4310/N-KJ	SCALE: N/A
SIZE: A4	SHEET: 1/1
REV: A	



www.terulai.com



DIMENSION IN MILLIMETERS (mm)

SCALE: N/A

SHEET: 1/1

REV: A