


TRL110819D

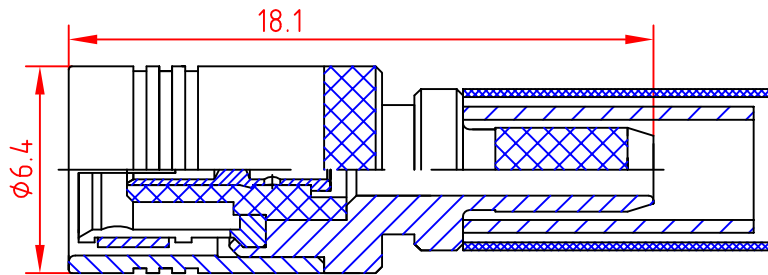

Notes:

Electrical characteristics

1. Impedance: 50Ω
2. Working voltage: $\leq 250V$
3. Insulation resistance: $\geq 1000M\Omega$
4. Dielectric strength: $750V$
5. Contact resistance

Center contact $\leq 6m\Omega$


Outer contact $\leq 1m\Omega$

Material&Finish

Inner Contact: gold plated over Beryllium copper

Outer Contact: gold plated over brass.

Insulators: Teflon



Scale

1:1

Name

Date

Designed

Tomson

19-Aug-11

Checked

Jason

19-Aug-11

Approved

Teresa

19-Aug-11

SMB-K3

RF Coaxial Connector

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES

.X± .15 ±1°
.XX± .05
.XXX±

Xi'an T-RELY ELECTRONICS CO., LTD.