
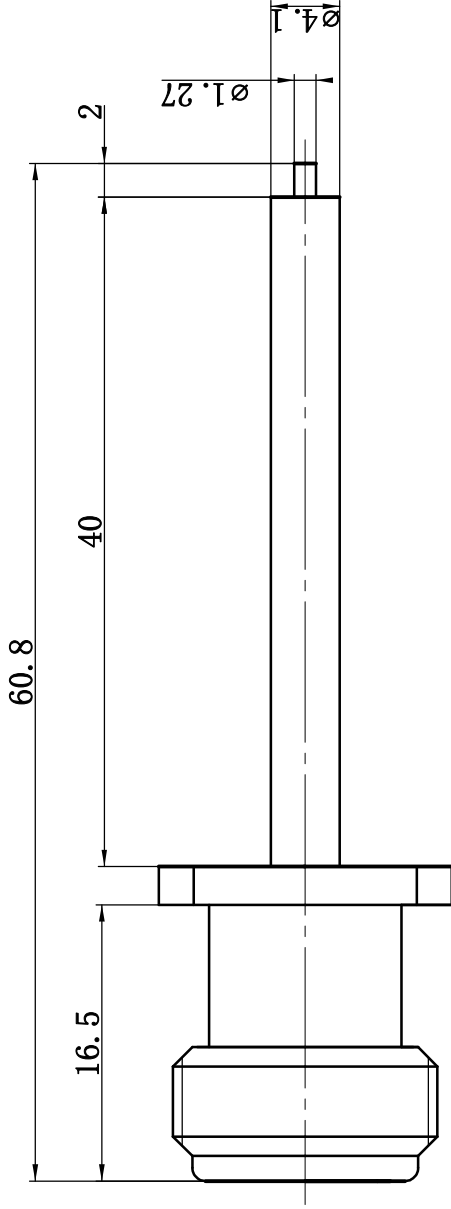


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/promotion purposes without written permission

REV	DESCRIPTION OF REVISION	TEL NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	21/04/16	21/04/16

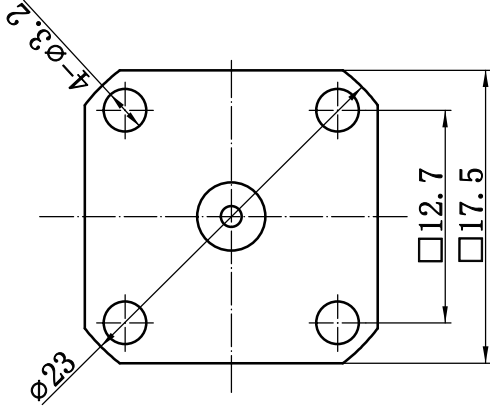

### 1 Electrical

- 1.1 Impedence  $50 \Omega$
- 1.2 Frequency DC-11GHz
- 1.3 VSWR 1.30: 1

### 2 Environmental&Mechanical

- 2.1 Temperature range  $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2.2 RoHS Compliant
- 2.3 Durability >500 cycles

### 3 Materials&plating

- 3.1 Body: Brass, Suco plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Bronze, Gold plated

### Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 21/04/16

ENGINEER: C. Tao 21/04/16

APPROVED: W. Qiang 21/04/16

TOLERANCES UNLESS OTHERWISE SPECIFIED  
X  $\pm 0.50$   
.X  $\pm 0.20$   
.XX  $\pm 0.10$   
ANGLES  $\pm 1^{\circ}$

TITLE:

RF Connector

N Female Flange Conn. For Terminal

PART NO: N-KFDT-1



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)

SCALE: N/A

SHEET: 1/1

REV: A