


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.HoJyun	21/05/08	21/05/08

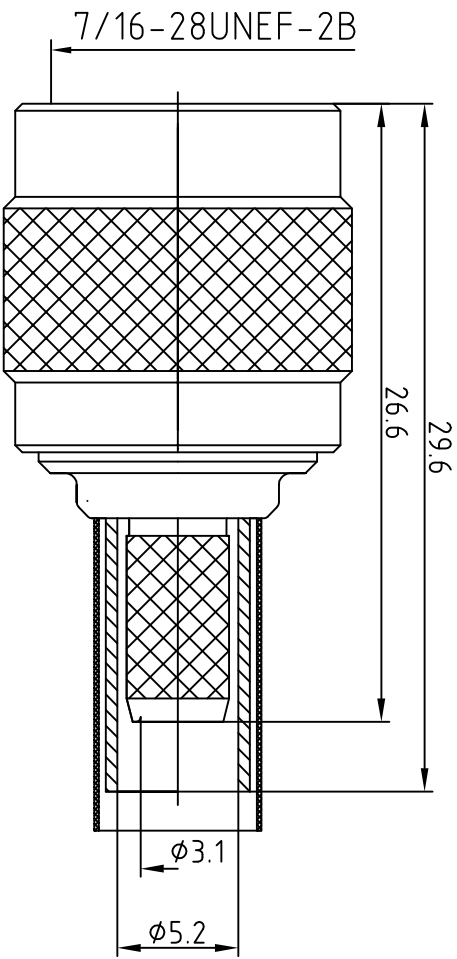


- 1 Electrical**
- 1.1 Impedence: 50Ω
 - 1.2 Frequency: DC~6GHz
 - 1.3 Dielectric withstanding voltage: 1500V(volts RMS)
 - 1.4 Center contact resistance: ≤ 1.5MΩ
 - 1.5 Outer contact resistance: ≤ 0.2MΩ
 - 1.6 Insulation resistance: ≥5000MΩ
- 2 Environmental&Mechanical**
- 2.1 Temperature range: -40℃~+70℃
 - 2.2 RoHs Compliant: >500 cycles
 - 2.3 Durability: >500 cycles
- 3 Materials&plating**
- 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Nut: Brass, Nickel plated
 - 3.5 Gasket: Silicon Rubber (red color)
 - 3.6 Washer: Brass, Nickel plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.HoJyun 21/05/08
ENGINEER: C.Too 21/05/08
APPROVED: W.Giang 21/05/08
TOLERANCES UNLESS OTHERWISE SPECIFIED
X 0.150
.X 0.20
.XX 0.10
ANGLES 3°

TITLE: TNC-15Y
TNC Male Conn. for RG58 Cable
Cr:imp
PART NO: TRL-TNCM-236509



 DIMENSION IN MILLIMETERS (mm)

SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A

www.trily.com.cn