


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency 0~18Ghz
 - 1.3 VSWR 1.30:1
- 2 Environmental & Mechanical
 - 2.1 Temperature range -45°~125°
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles
- 3 Materials & plating
 - 3.1 Body: Brass, Gold Plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass,, Gold Plated
 - 3.4 Nut : Stainless Steel Passivated

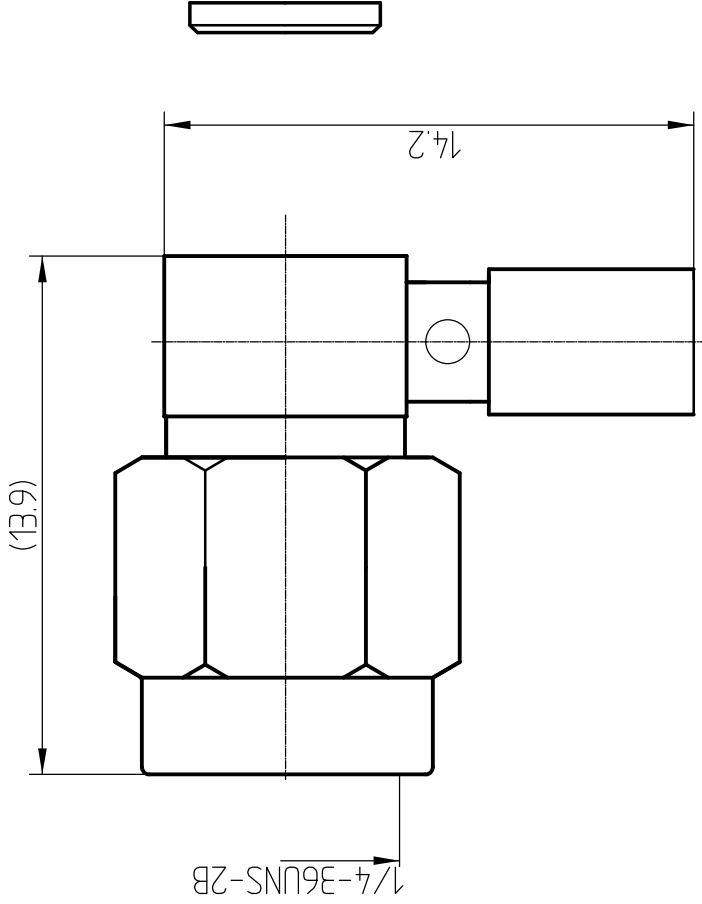

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	12/7/13	12/7/13

DRAWN: T. Shihua 12/07/13		TITLE: RF Coaxial Connector	
ENGINEER: C. Tao 12/07/13		www.fenulial.com	
APPROVED: W. Qiang 12/07/13		DIMENSION IN MILLIMETERS (mm)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: N/A	
X	+0.50	A4	SHEET: 1/1
.X	+0.20	SIZE: A4	REV: A
.XX	+0.10		
ANGLES	*°		
PART NO: SMA-JWB20G		PART NO: SMA-JWB20G	

Notes:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY