


TR130403A

This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission
 本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖，销售及采购。

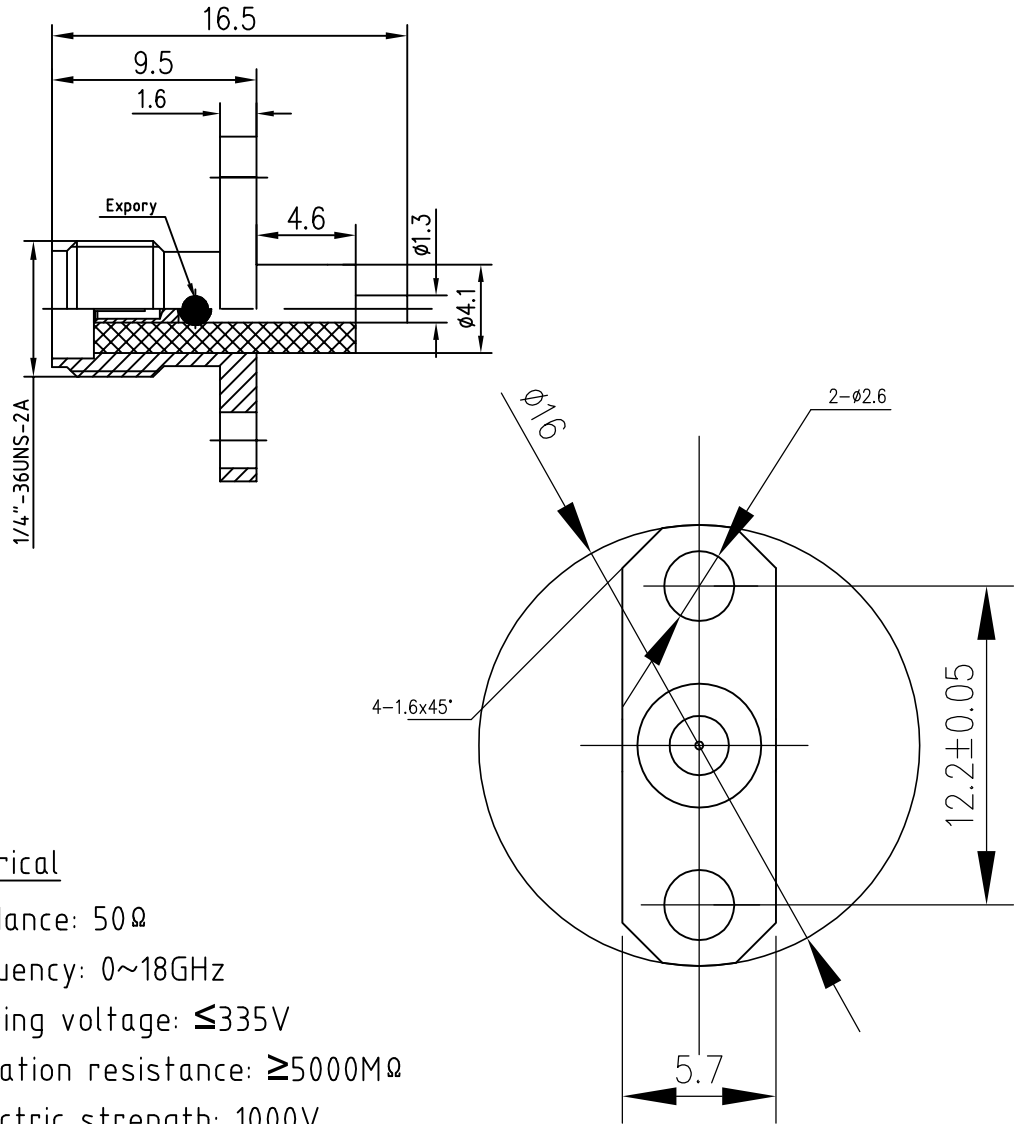


1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: 0~18GHz
- 1.3 Working voltage: ≤335V
- 1.4 Insulation resistance: ≥5000MΩ
- 1.5 Dielectric strength: 1000V
- 1.6 Contact resistance: Center contact ≤ 3MΩ
Outer contact ≤ 2.5MΩ

2 Material&Finish

- 2.1 Inner Contact: Beryllium-copper, gold plated
- 2.2 Outer Contact: Brass, gold plated
- 2.3 Insulators: Teflon



Scale

1:1

Name

Date

Designed

Tomson

3-Apr-13

Checked

Jason Cai

3-Apr-13

Approved

Mike Tang

3-Apr-13

SMA-KFD711
RF Coaxial Connector

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

Xi'an T-RELY ELECTRONICS CO., LTD.