


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission


- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-6GHz
 - 1.3 Dielectric withstanding voltage: 750V(volts RMS)
 - 1.4 Center contact resistance: ≤ 5MΩ
 - 1.5 Outer contact resistance: ≤ 2.5MΩ
 - 1.6 Insulation resistance: ≥ 1000MΩ

- 2 Environmental&Mechanical
 - 2.1 Temperature range: -45°C ~ 125°C
 - 2.2 RoHs Compliant
 - 2.3 Durability: >500 cycles

- 3 Materials&Finish
 - 3.1 Body: Brass, Gold plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, gold plated
 - 3.4 Contact spring: Beryllium copper, gold plated

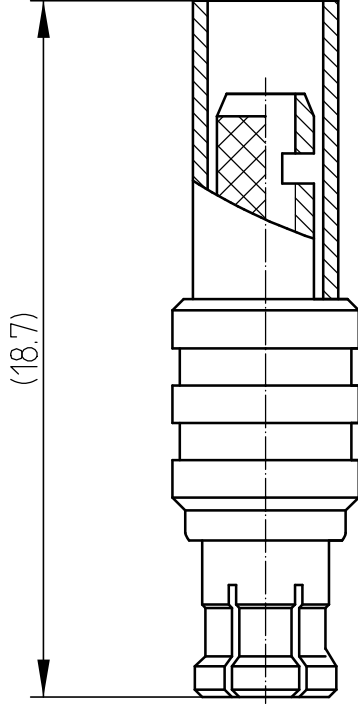

电缆剥线尺寸

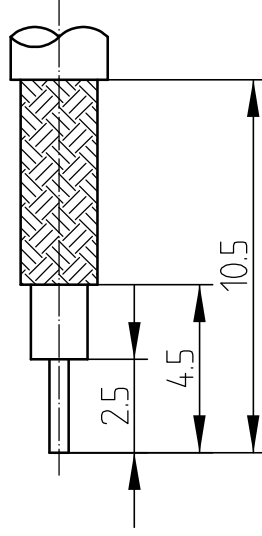

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	12/7/06	12/7/06

DRAWN: T. Shihua 12/07/06	TITLE:
ENGINEER: C. Tao 12/07/06	RF Coaxial Connector
APPROVED: W. Qiang 12/07/06	MCX male Str. Conn. For RG316 cable
TOLERANCES UNLESS OTHERWISE SPECIFIED	
X ±0.50	
.X ±0.20	
.XX ±0.10	
ANGLES ±1°	

		www.terulilai.com	
		DIMENSION IN MILLIMETERS (mm)	
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A