This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	T.Shihua	02/08/13	02/08/13

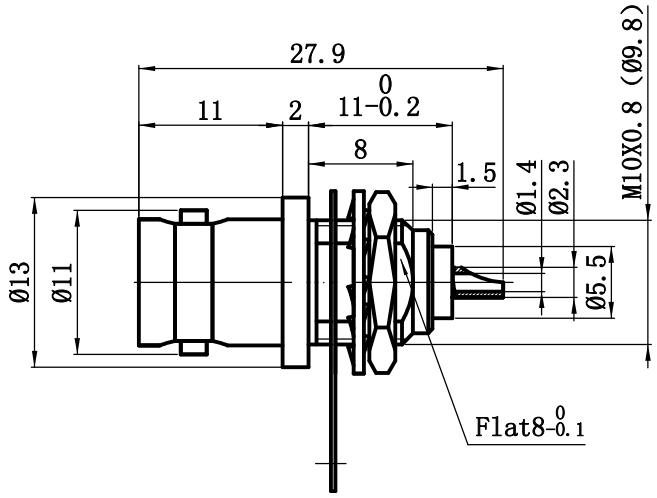

推荐安装孔尺寸

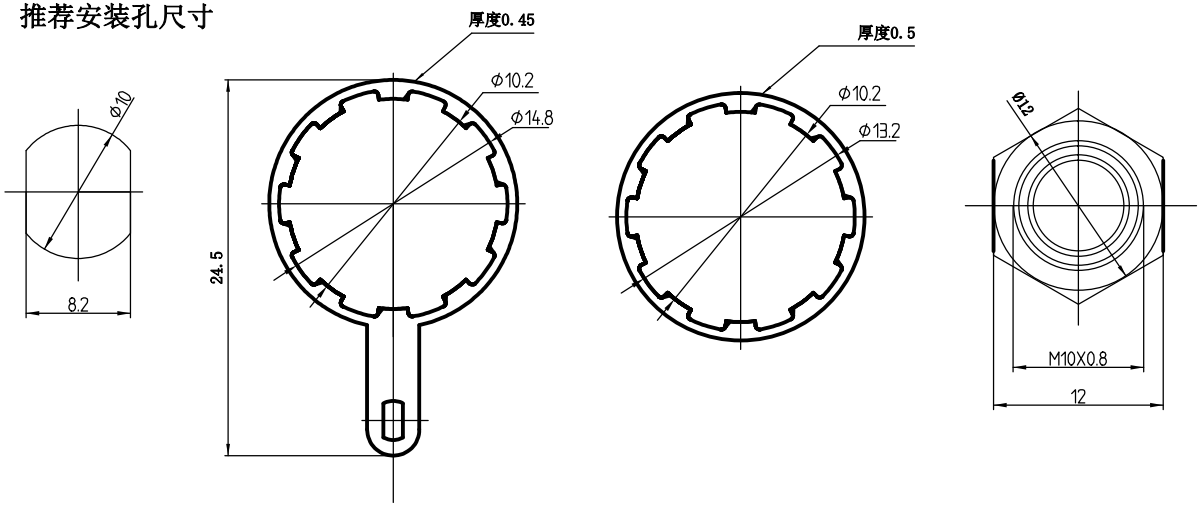

1 Electrical

1.1 Impedence	50Ω
1.2 Frequency	DC-4GHz
1.3 VSWR	1.30:1

2 Environmental&Mechanical

2.1 Temperature range	-45℃~125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, Nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Phosphor Bronze, Gold plated
3.4 Washer:	Bronze,nickel plated
3.5 Hex Nut:	Brass, nickel plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 02/08/13	TITLE: RF Coaxial Connector BNC Female bulkhead Conn. For Solder Pot Terminal				
ENGINEER: C.Tao 02/08/13					
APPROVED: W.Qiang 02/08/13					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		DIMENSION IN MILLIMETERS (mm)			
	PART NO: BNC-KYD5	SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A