REVISION		
REV	DESCRIPTION	DATE

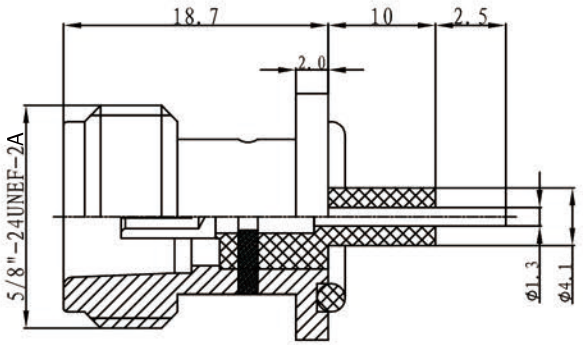

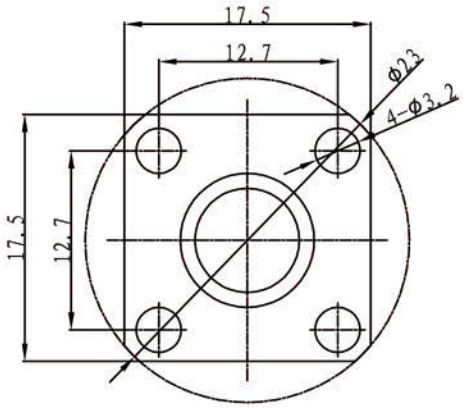

Electrical Characteristics

Impedence	50Ω
Frequency	0-11GHz
Dielectric withstanding voltage	1500V
Center contact resistance	1 MΩ
Outer contact resistance	0.2MΩ
Insulation resistance:	5000 MΩ
Working voltage:	750V(rms)
VSWR	1.30(MAX)

Material&Plating

Body	Brass, Nickle Plating
Center contact	Phosphor bronze, gold plating
Insulators	PTFE

Environmental Characteristics

Temperature range	-65℃~+165℃

Mechanical Characteristics

Durability	500 cycles

No.	Description	Qty.	Material	Finish	Notes

CUSTOMER

CUSTOMER CODE

DATE: 17-Aug-10

APPROVED	Michael Tang
CHECKED	Teresa
DRAWN	Jason

SCALE 3:1 | UNIT mm | WEIGHT —

T-rely Electronics Co.,Ltd.

TITLE

N-KFD102

A4

DWG NO.: TRL101022E

SHEET: 1:1