

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV		DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release			T.Holyn	26/04/06	26/04/06

1 Electrical

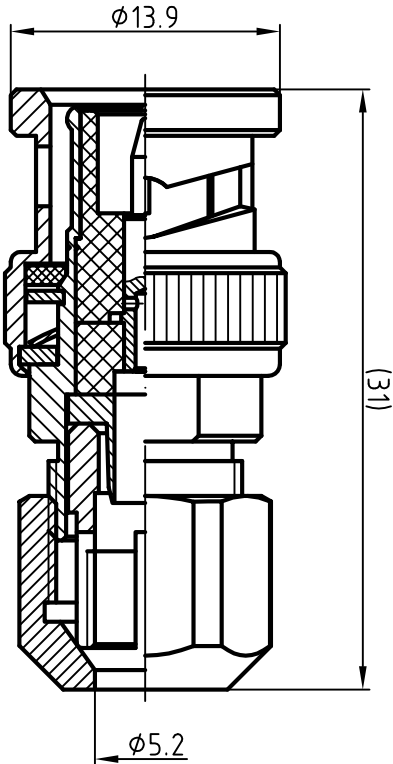
- 1.1 Frequency: 0-4GHz
- 1.2 Impedance: 50Ω
- 1.3 Working voltage: ≤500V
- 1.4 Insulation resistance: ≥5000MΩ
- 1.5 Dielectric withstanding voltage: 1500V
- 1.6 Center contact resistance ≤ 1.5MΩ
- 1.7 Outer contact resistance ≤ 1MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~+70℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles



3 Material&Finish

- 3.1 Inner Contact: brass, gold plated
- 3.2 Outer Contact: Brass, nickel plated
- 3.3 Insulators: Teflon



Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Holyn 26/04/06	TITLE: BNC-J5A			
ENGINEER: C.Too 26/04/06	BNC male Conn. for RG58 Cable			
APPROVED: W.Qiang 26/04/06	Clamp			
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X	±0.50			
XX	±0.20			
XXX	±0.10			
ANGLES	±1°			
PART NO: TRL-TNCM-200898	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
<div><div><p>www.t-rely.com.cn</p></div><p>DIMENSION IN MILLIMETERS (mm)</p></div>				