


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Frequency: DC-2GHz
 - 1.2 Impedance: 75Ω
 - 1.3 Working voltage: $\leq 500V$
 - 1.4 Insulation resistance: $\geq 5000M\Omega$
 - 1.5 Dielectric withstanding voltage: $1500V$
 - 1.6 Center contact resistance $\leq 1.5M\Omega$
 - 1.7 Outer contact resistance $\leq 1M\Omega$
- 2 Environmental & Mechanical
 - 2.1 Temperature range $-40^{\circ}C \sim +70^{\circ}C$
 - 2.2 RoHS Compliant
 - 2.3 Durability > 500 cycles
- 3 Material & Finish
 - 3.1 Inner Contact: brass, gold plated
 - 3.2 Outer Contact: Brass, nickel plated
 - 3.3 Insulators: Teflon

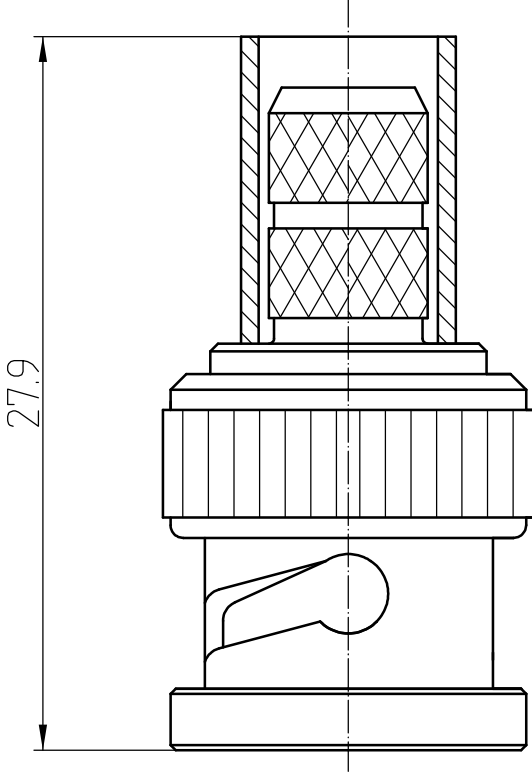

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	17/03/15	17/03/15

DRAWN: T. Haiyun 17/03/15		TITLE: RF Coaxial Connector	
ENGINEER: C. Tao 17/03/15		www.terulilai.com	
APPROVED: W. Qiang 17/03/15		DIMENSION IN MILLIMETERS (mm)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: N/A	
X	+0.50	SHEET: 1/1	
.X	+0.20	REV: A	
.XX	+0.10	PART NO: BNC-75JR66Y	
ANGLES	*°	SIZE: A4	