


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	BY	DATE	APPROVED
A	Initial Release	T.Haiym	12/1/12	12/1/12

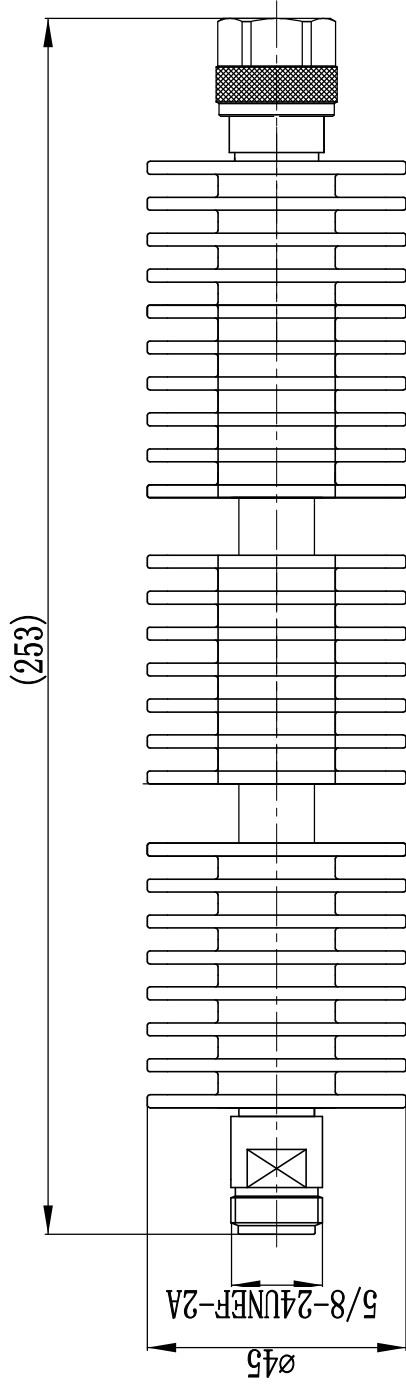

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 vswr 1.30:1
 - 1.4 Power 100W
 - 1.5 Attenuator Value 10, 20, 30, 40dB⁺²₋₁
- Environmental&Mechanical
 - 2.1 Temperature range -55^o ~ +125^o
 - 2.2 RoHS Compliant
- 3 Materials&plating
 - 3.1 Outer Contact: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.4 Body: Aluminum, Oxidation Blackeded
 - 3.3 Contact Pin: Bronze, gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Haiym 12/1/12 ENGINEER: C.Tao 12/1/12 APPROVED: H.Guang 12/1/12 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ° ±1°	TITLE: RF Fixed Attenuator N Male to Female 6GHz 100W 20dB	 www.rf-connector-china.com
PART NO: TEL-NMF-100-6-XX	DIMENSION IN MILLIMETERS (mm)	SCALE: N/A SHEET: 1/1 REV: A