


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	17/06/21	17/06/21

400 ±4

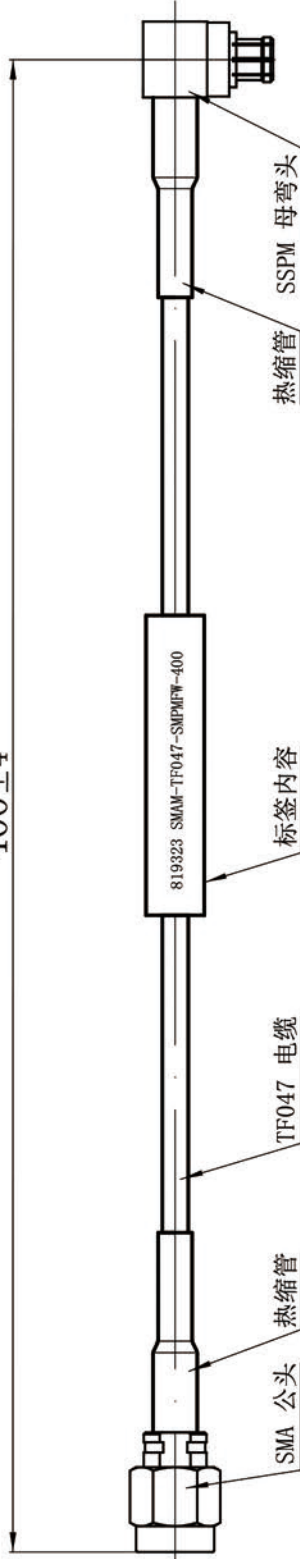

- 1 电气性能
 - 1.1 特性阻抗: 50 Ω
 - 1.2 使用频率: DC~4.5GHz
 - 1.3 驻波比: 1.15:1
 - 1.4 插损: ≤1.6dB
 - 1.5 绝缘电阻: ≥5000MΩ
 - 1.6 介质耐压: 750V (AC)
- 2 机械性能
 - 2.1 电缆弯曲半径: 10mm (单次), 20mm (多次)
 - 2.2 寿命: 大于100次
- 3 连接器1 SMA-IBIAG
 - 3.1 内导体: 黄铜、镀金
 - 3.2 外导体: 黄铜、镀三元
 - 3.3 绝缘体: PTFE
 - 3.4 镀层: 不锈钢, 钝化
- 4 连接器1 SMPM-KWB1.37-3
 - 4.1 内导体: 铜青铜、镀金
 - 4.2 外导体: 铜青铜、镀金
 - 4.3 绝缘体: PTFE
- 5 使用环境
 - 5.1 工作温度 -40° C to 105° C

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 17/06/21

ENGINEER: C. Tao 17/06/21

APPROVED: W. Qiang 17/06/21

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ±0.50

.X ±0.20

.XX ±0.10

ANGLES ±1°

TITLE:

Cable Assembly

SMA Male to SMPM Female R/A for TF047 Cable Length 400mm

PART NO: TRL-SMAM-TF047-SMPMFW-400



www.rfconnector-china.com



DIMENSION IN MILLIMETERS (mm)

SCALE: N/A

SHEET: 1/1

REV: A