

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.HoIyun	28/8/13	28/8/13

1 Electrical


- 1.1 Impedance 50Ω
- 1.2 Frequency 0~18GHz
- 1.2 Dielectric withstanding voltage 1000V(volts RMS)
- 1.3 Working Voltage: 335V rms
- 1.5 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~85℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles


3 Materials&plating

- 3.1 Body: Brass, SUCO plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated
- 3.4 Housing: Brass, SUCO plated

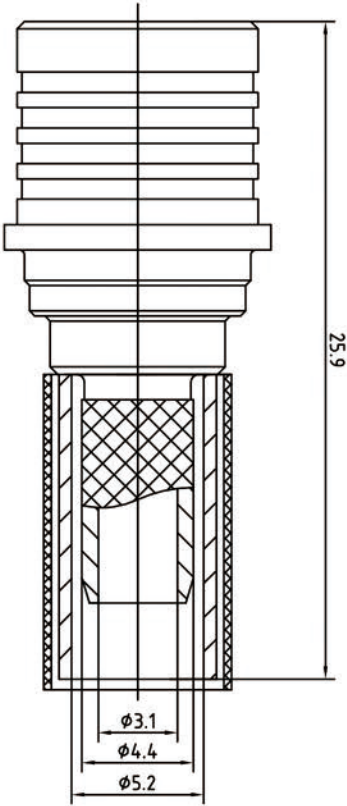

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.HoIyun 28/08/13	TITLE: QMA-J5Y		
ENGINEER: C.Too 28/08/13	QMA male Str. Conn. For RG58 cable	www.rf-conector-china.com	
APPROVED: W.Qiang 28/08/13	PART NO: TRL-QMAM-5139	SIZE: A4	SCALE: 1:1
TOLERANCES UNLESS OTHERWISE SPECIFIED		SHEET: 1/1	REV: A
X ±0.50			
.X ±0.20			
.XX ±0.10			
ANGLES 30°			