

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	TRL NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	15/04/2022	15/04/2022

**1 Electrical**

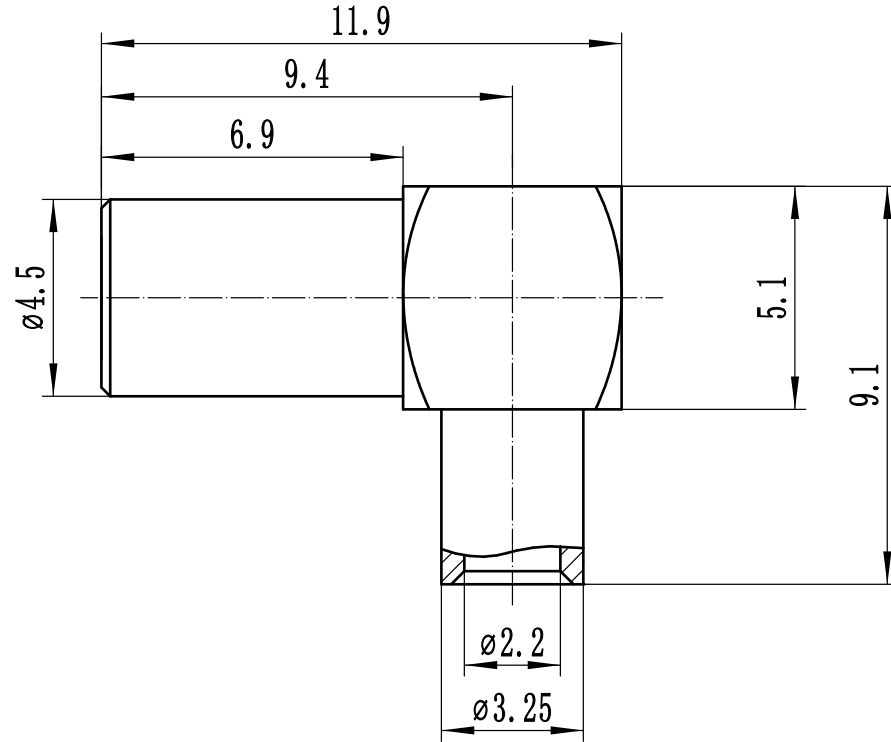
- 1.1 Impedence                    50 Ω
- 1.2 Frequency                    DC~4GHz
- 1.3 VSWR                         1.30: 1

**2 Environmental&Mechanical**

- 2.1 Temperature range        -45°C~125°C
- 2.2 RoHs Compliant
- 2.3 Durability                    >500 cycles



**3 Materials&plating**

- 3.1 Body:                         Brass, Gold plated
- 3.2 Insulator:                  Teflon
- 3.3 Contact Pin:                Beryllium-copper, Gold plated



**Notes:**

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

<b>DRAWN:</b> T. Shihua 15/04/2022	<b>TITLE</b> RF Coaxial Connector	 www.rf-connector-china.com			
<b>ENGINEER:</b> C. Tao 15/04/2022					
<b>APPROVED:</b> W. Qiang 15/04/2022		SSMB Right-angle plug for RG405 cable	 DIMENSION IN MILLIMETERS (mm)		
<b>TOLERANCES UNLESS OTHERWISE SPECIFIED</b> X ±0.50 .X ±0.20 .XX ±0.10 <b>ANGLES</b> ±1°	<b>PART NO:</b> SSMB-KWB2	<b>SIZE:</b> A4	<b>SCALE:</b> 6:1	<b>SHEET:</b> 1/1	<b>REV:</b> VA