


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission



REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	New Release	—	T. Shihua	29/04/21	29/04/21

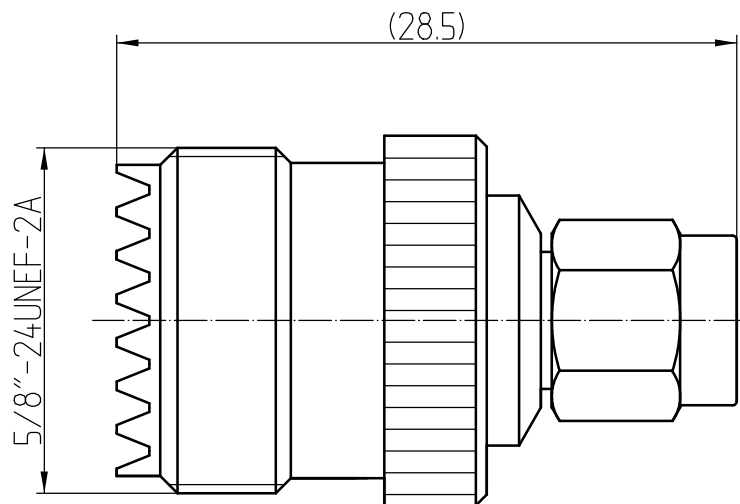

- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-300MHz
 - 1.3 Dielectric withstanding voltage: 2000V(volts RMS)
- 2 Environmental&Mechanical
 - 2.1 Temperature range: -40 °C~125 °C
 - 2.2 RoHS Compliant
 - 2.3 Durability: >500 cycles
- 3 Materials&Finish
 - 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Coupling Nut: Brass, Nickel plated
 - 3.5 Gasket: Silicon rubber (red color)
 - 3.6 C-ring: Phosphor bronze, nickel plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 29/04/21 ENGINEER: C. Tao 29/04/21 APPROVED: W. Qiang 29/04/21 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Adaptor UHF male to SMA Female Adaptor	 www.rf-connector-china.com  DIMENSION IN MILLIMETERS (mm)		
PART NO: UHF/SMA-KJ	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A