


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission



REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	New Release	—	T. Shihua	29/04/21	29/04/21

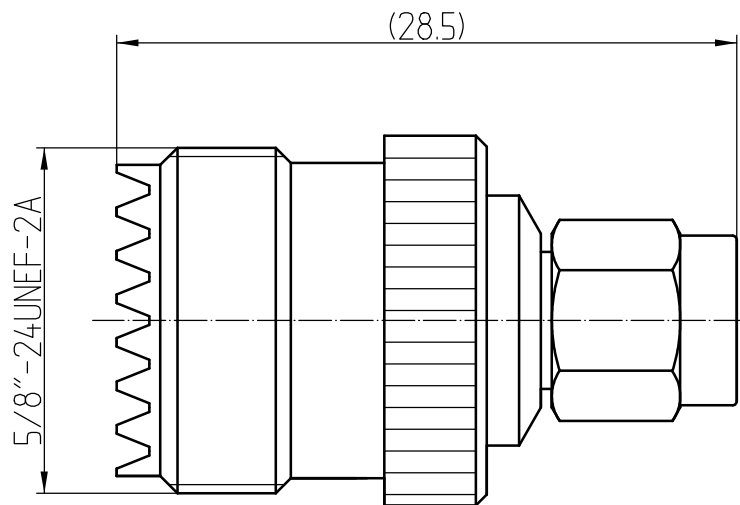

- 1 Electrical**
 1.1 Impedance: 50 Ω
 1.2 Frequency: DC-300MHz
 1.3 Dielectric withstanding voltage: 2000V(volts RMS)
- 2 Environmental&Mechanical**
 2.1 Temperature range: -40 °C~125 °C
 2.2 RoHS Compliant
 2.3 Durability: >500 cycles
- 3 Materials&Finish**
 3.1 Body: Brass, Nickel plated
 3.2 Insulator: Teflon
 3.3 Contact Pin: Brass, Gold plated
 3.4 Coupling Nut: Brass, Nickel plated
 3.5 Gasket: Silicon rubber (red color)
 3.6 C-ring: Phosphor bronze, nickel plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 29/04/21 ENGINEER: C. Tao 29/04/21 APPROVED: W. Qiang 29/04/21 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Adaptor UHF Female to SMA male Adaptor PART NO: UHF/SMA-KJ	 www.rf-connector-china.com  DIMENSION IN MILLIMETERS (mm)	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A
--	--	--	--