

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

| REV | DESCRIPTION OF REVISION | ECN NO. | BY | DATE | APPROVED |
|-----|-------------------------|---------|-----------|----------|----------|
| A | Initial Release | — | T. Shihua | 09/07/15 | 09/07/15 |

1 Electrical

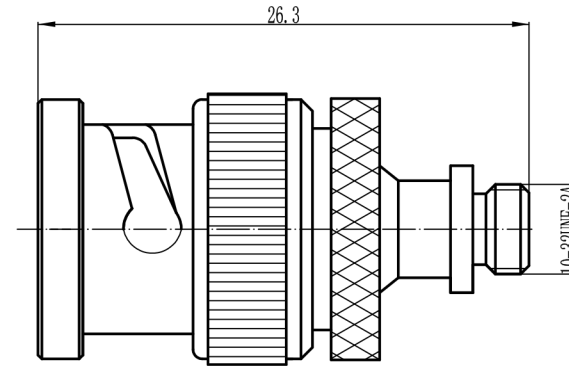
- 1.1 Impedence 50 Ω
- 1.2 Frequency DC-4GHz
- 1.3 Dielectric withstanding voltage 1000V(volts RMS)
- 1.4 Center contact resistance ≤ 3MΩ
- 1.5 Outer contact resistance ≤ 2MΩ
- 1.6 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -45℃~85℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles



3 Materials&plating

- 3.1 Body: Brass, Nickel Plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Beryllium-copper, Gold plated



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | | |
|---|---|--|
| DRAWN : T. Shihua 09/07/15 ENGINEER: C. Tao 09/07/15 APPROVED : W. Qiang 09/07/15 | TITLE: RF Adaptor BNC male to 1032 Female adaptor PART NO: BNC/1032-JK |  www.rf-connector-china.com  DIMENSION IN MILLIMETERS (mm) |
| TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1° | SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A | |