


This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission.
 本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

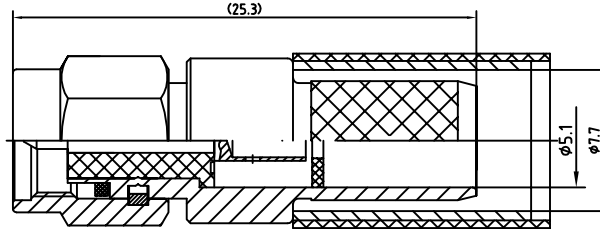

电气指标:

1. 频率范围: DC~12.4GHz
2. 接触电阻
 内导体: $\leq 3 \text{ m}\Omega$
 外导体: $\leq 2 \text{ m}\Omega$
3. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
4. 介质耐压: 1000V(rms)
5. 使用寿命: 500次

执行标准: GB681A(MIL-C-39012)

材料&镀层

1. 中心接触件: 黄铜, 镀金
 2. 外壳: 黄铜, 镀金
 3. 绝缘子: PTFE
- 适配电缆: LMR300

Electrical Characteristics:

1. Frequency range: DC~12.4GHz
2. Contact resistance
 Center conductor: $\leq 3 \text{ m}\Omega$
 Out conductor: $\leq 2 \text{ m}\Omega$
3. Insulation resistance: $\geq 5000 \text{ M}\Omega$
4. Insulator withstanding: 1000V(rms)
5. Durability: 500cycles

Application: GB681A(MIL-C-39012)

Material&Finishing

1. Center contact: **Brass, gold plated**
 2. Body :brass, gold plated
 3. Insulators: PTFE
- Cable code: LMR300

FIRST ANGLE PROJECTION		SCALE	SMA-J300	UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .20 ±1° .XX± .10 .XXX±
THIRD ANGLE PROJECTION		2:1		mm	
	NAME	DATE	REV		
DRAWN	Tomson Tang	09-Aug-12	V1.0		
CHECKED	Magi Wang	09-Aug-12			
APPROVED	Teresa Shen	09-Aug-12			
RF Coaxial Connector			Xi'an T-rely Electronics Co.,Ltd.		