


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
  - 1.1 Impedence 50 Ω
  - 1.2 Frequency 0~12Ghz
  - 1.3 VSWR ≤1.20@6GHz
- 2 Environmental&Mechanical
  - 2.1 Temperature range -45°C~125°C
  - 2.2 RoHs Compliant
  - 2.3 Durability >500 cycles
- 3 Materials&plating
  - 3.1 Body: Brass, Gold Plated
  - 3.2 Insulator: Teflon
  - 3.3 Contact Pin: Brass, Gold Plated
  - 3.4 Nut: Brass, Gold Plated

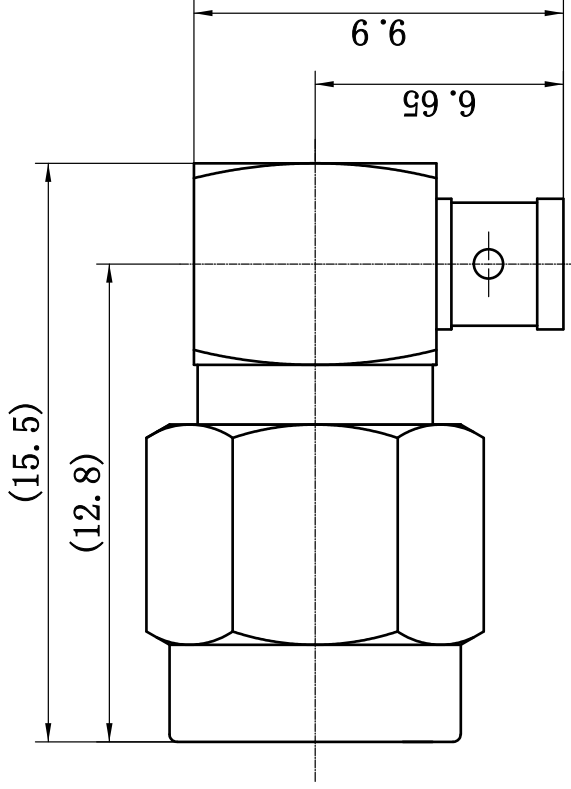

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	12/7/13	12/7/13

Notes:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DATE : T. Shihua 12/07/13	TITLE: RF Coaxial Connector	WWW.TERUIA.COM
DESIGNER : C. Tao 12/07/13		
APPROVER : W. Qiang 12/07/13		
TOLERANCES UNLESS OTHERWISE SPECIFIED		
X ±0.50		
.X ±0.20		
.XX ±0.10		
ANGLES ±1°		
DATE: A4	SCALE: N/A	REVISION: 1/1
REV: A		



DIMENSION IN MILLIMETERS (mm)