


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC-6GHz
 - 1.3 Dielectric withstanding voltage 1500V (volts RMS)
 - 1.4 Center contact resistance ≤ 1MΩ
 - 1.5 Outer contact resistance ≤ 0.2MΩ
 - 1.6 Insulation resistance: ≥ 5000MΩ
 - 1.7 VSWR ≤ 1.20@3GHz
- 2 Environmental&Mechanical
 - 2.1 Temperature range -55℃~155℃
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&plating
 - 3.1 Body: Brass, nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Coupling Nut: Brass, nickel plated
 - 3.5 Gasket: Silicon rubber (red color)

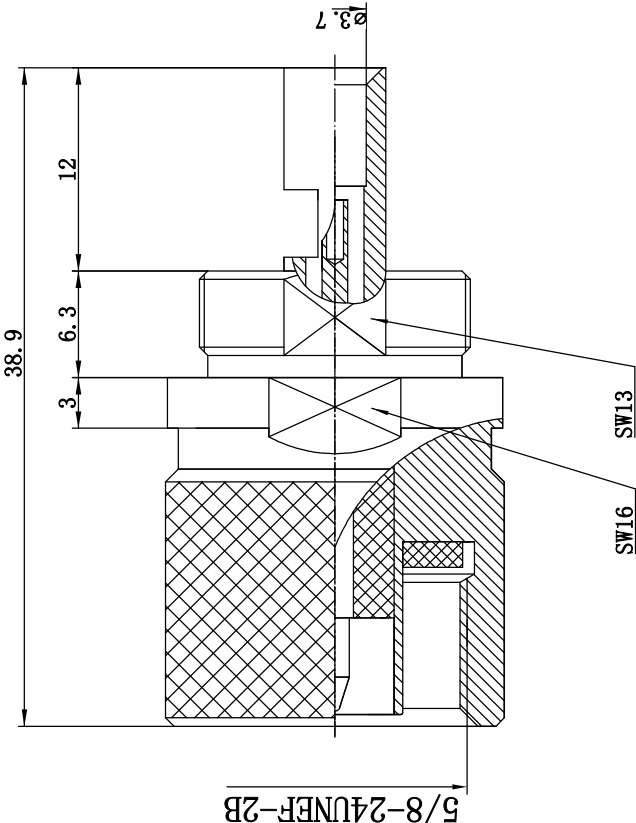

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | | | |
|---------------------------------------|-------|---|------------|
| DRAWN: T. Shihua 30/09/15 | | TITLE: | |
| ENGINEER: C. Tao 30/09/15 | | RF Coaxial Connector | |
| APPROVED: W. Qiang 30/09/15 | | N Male Bulkhead Conn. For RG402/141 Cable | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | DIMENSION IN MILLIMETERS (mm) | |
| X | ±0.50 | SIZE: A4 | SCALE: N/A |
| .X | ±0.20 | SHEET: 1/1 | REV: A |
| .XX | ±0.10 | PART NO: N-JYB3C | |
| ANGLES | ±1° | www.terulia.com | |