



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

(37.8)

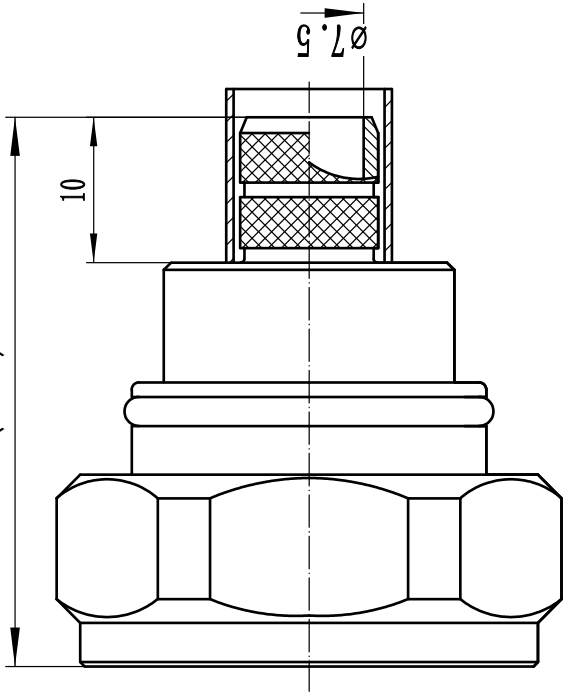

Cable Stripping Dimension

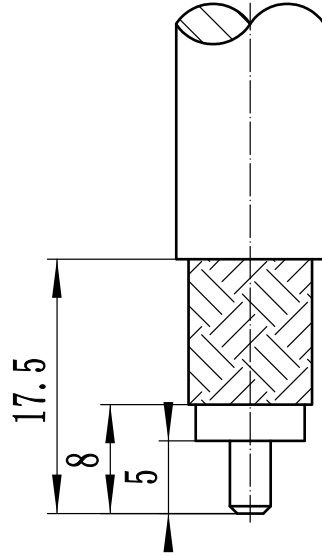

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency DC~7.5GHz
 - 1.3 Dielectric withstanding voltage 4KV at Sea Level
 - 1.4 Insulation resistance: >10000MΩ
 - 1.5 VSWR <1.25:1@3GHz

- 2 Environmental&Mechanical
 - 2.1 Temperature range -55℃~125℃
 - 2.2 RoHs Compliant Yes
 - 2.3 Durability >500 cycles

- 3 Materials&Finish
 - 3.1 Body: Brass, Suco-plated
 - 3.2 Insulator: Teflon
 - 3,3 Contact Pin: Brass, Gold plated
 - 3.4 Coupling Nut: Brass, Suco-plated
 - 3.5 Gasket: Silicone Rubber

REV	DESCRIPTION OF REVISION	TEL. NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	25/03/2022	25/03/2022

DRAWN: T. Shihua 25/03/2022		TITLE			
ENGINEER: C. Tao 25/03/2022		RF Coaxial Connector			
APPROVED: W. Qiang 25/03/2022		www.rf-connector-china.com			
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)			
X	±0.50				
.X	±0.20				
.XX	±0.10				
ANGLES	±1°	SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: VA
PART NO: L29-J400Y-1					