


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-6GHz
 - 1.3 VSWR: 1.20:1@3GHz
- 2 Mechanical&Environmental
 - 2.1 Temperature range -45° C ~+125° C
 - 2.2 Durability (matings) >500
 - 2.3 RoHs Compliant Yes
- 3 Material&Finish
 - 3.1 Pin contact: Brass, Gold plated
 - 3.2 Body: Brass, Suco-Plated
 - 3.3 Insulators: Teflon

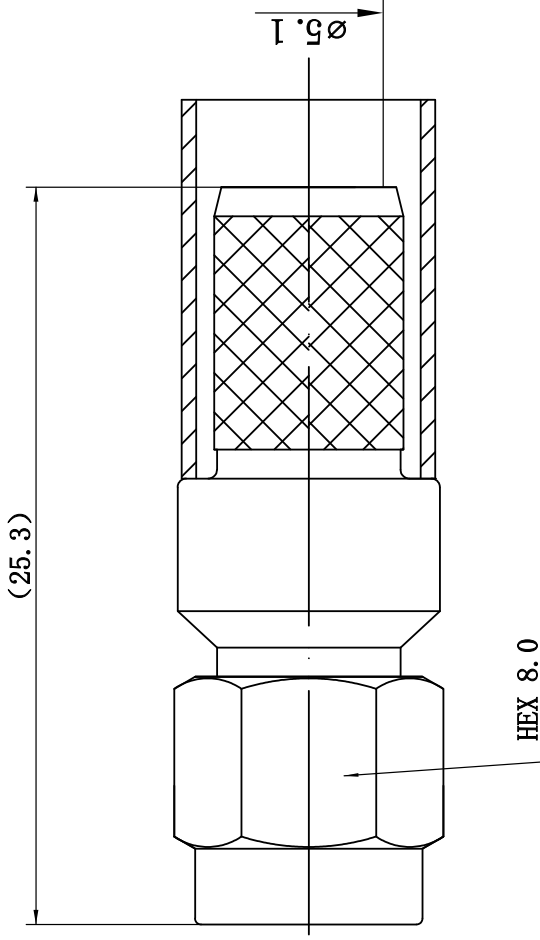

REV	DESCRIPTION OF REVISION	TEL NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	05/05/2022	05/05/2022

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 05/05/2022	TITLE
ENGINEER: C. Tao 05/05/2022	RF Coaxial Connector
APPROVED: W. Qi tang 05/05/2022	SMA Male Conn. for LMR300/5D-PB Cable
TOLERANCES UNLESS OTHERWISE SPECIFIED	
X ±0.50	
.X ±0.20	
.XX ±0.10	
ANGLES ±1°	
PART NO: SMA-J300Y	SCALE: 4:1
	SIZE: A4
	SHEET: 1/1
	REV: VA



DIMENSION IN MILLIMETERS (mm)

www.rf-connector-china.com