


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

7.4

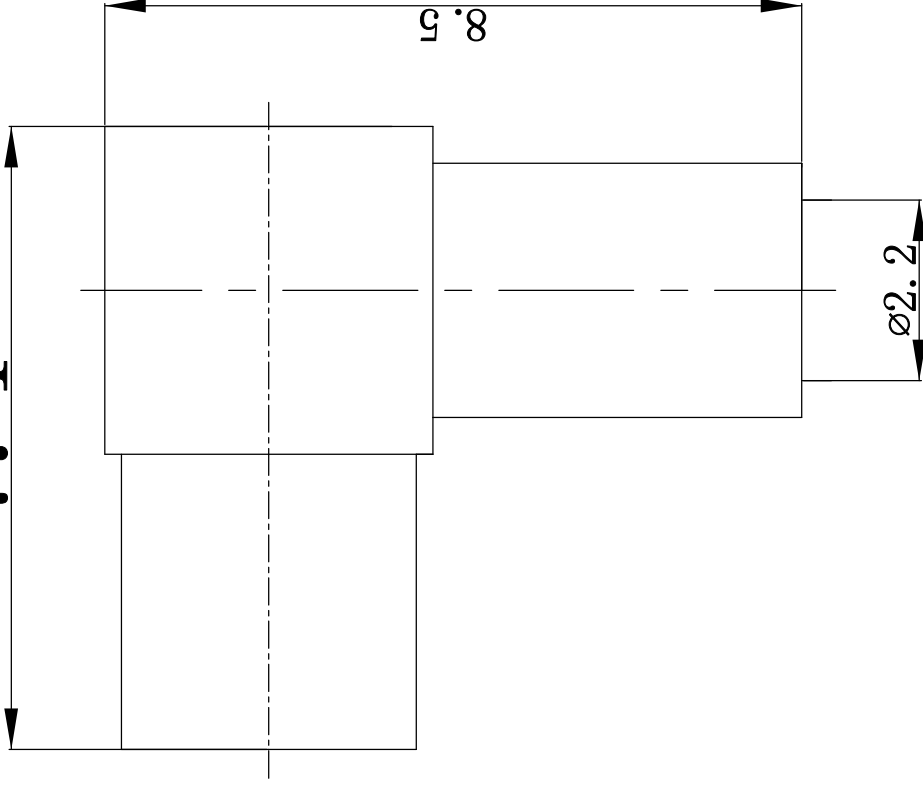

- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: 0-6GHz
 - 1.3 Working voltage: $\leq 170V$
 - 1.4 Insulation resistance: $\geq 1000M\Omega$
 - 1.5 Dielectric withstanding voltage: 500V
 - 1.6 Center contact resistance $\leq 10M\Omega$
 - 1.7 Outer contact resistance $\leq 5M\Omega$
 - 1.8 VSWR: 1.30:1

- 2 Material&Finish
 - 2.1 Inner Contact: Beryllium-copper, gold plated
 - 2.2 Outer Contact: brass, gold plated
 - 2.3 Insulators: Teflon

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	12/7/06	12/7/06

DRAWN: T. Shihua 12/07/06
ENGINEER: C. Tao 12/07/06
APPROVED: W. Qiang 12/07/06
TOLERANCES UNLESS OTHERWISE SPECIFIED
X +0.50
.X +0.20
.XX +0.10
ANGLES *°

TITLE:		RF Coaxial Connector	
PART NO:		MMCX-RWB2	
DRAWN:		T. Shihua	
ENGINEER:		C. Tao	
APPROVED:		W. Qiang	
DATE:		12/07/06	
SCALE:		N/A	
SHEET:		1/1	
REV:		A	

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)

SIZE:	A4	SCALE:	N/A	SHEET:	1/1	REV:	A
-------	----	--------	-----	--------	-----	------	---