

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	1/8/14	1/8/14

1 Electrical  
 1.1 Impedance: 50Ω  
 1.2 Frequency: DC-40GHz  
 1.3 VSWR: 1.25:1

2 Mechanical&Environmental

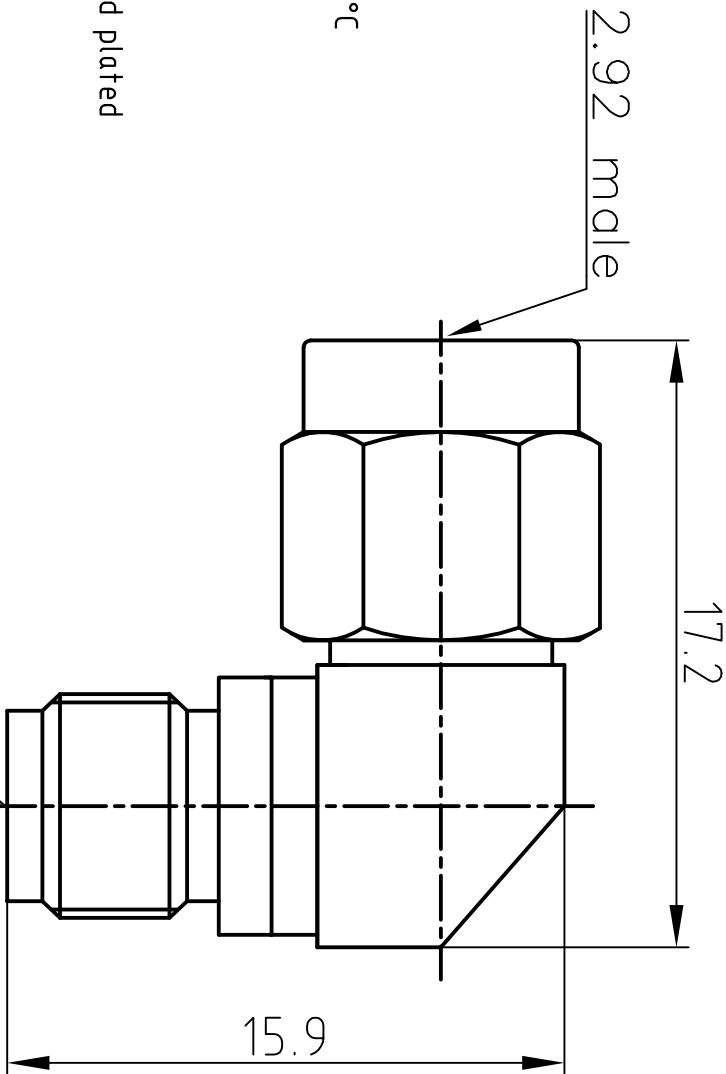
- 2.1 Temperature range -55°C ~+165°C
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant Yes

3 Material&Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Stainless Steel, Passivated
- 3.3 Insulators: PEI



4 Interface Standards

- 4.1 2.92 MIL-STD-348A



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 1/8/14	TITLE: Precision Adapter	 www.tril.com
ENGINEER: C.Too 1/8/14	2.92 Female to 2.92 Male Right Angle	
APPROVED: W.Qiang 1/8/14	PART NO: 2.92-JMKG	 DIMENSION IN MILLIMETERS (mm)
TOLERANCES UNLESS OTHERWISE SPECIFIED	SIZE: A4	SCALE: N/A
X ±0.05	SHEET: 1/1	REV: A
X ±0.02		
XX ±0.01		
ANGLES 5°		